


Can 180

Array CXB

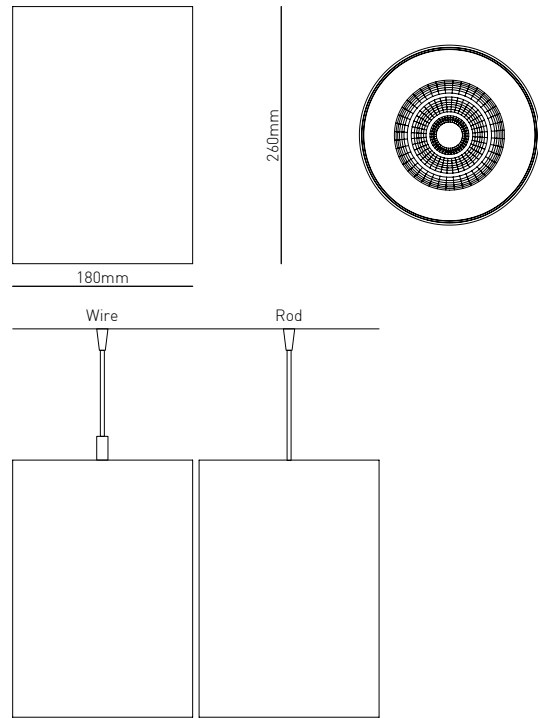

Features

- Energy saving
- Surface mount with pendant rod and wire options
- Full intensity from switch on
- Interchangeable LED engine
- Wide range of LED CCTs and reflectors
- CREE 2 step McAdam LEDs
- CRI >95 available on request
- Long life L70 50,000 hrs based on LM-80 & TM-21 applicable test data
- Integral constant current driver with S.E.L.V. output
- Mains phase, 0-10V and DALI dimming options available
- 5 Year warranty

Luminaire Specification

Height	260mm
Bezel	Ø180mm
Luminaire material	Aluminium with textured powder coat finish.
IP Rating	IP20 IP65 option

LED Specification

LED	CREE CXB
Output	E85 (30W) : 3085lm (102lm/W) E120 (42W) : 4230lm (100lm/W)
CRI/CCT	2700°K, 3000°K, 4000°K, 5000°K >80Ra as standard >90Ra option
Optics	Narrow 24°, wide 40°, flood 60°
Drive current	E85 : 850mA E120 : 1.2A

Ordering Information example 2474.233E85-W10

Model	Finish	LED CCT	Driver	Version	CRI	IP Rating	Mounting	Length	
2472.	Narrow 24°	1 White	2 2700°K	1 Non dimming	E85 30W / 850mA	CRI (std)	IP20	Surface	N/A
2474.	Wide 40°	2 Black	3 3000°K	2 Phase dimming	E120 42W / 1.2A	9 CRI >90	6 IP65	-R Pendant rod	10 100cm
2476.	Flood 60°	7 Silver	4 4000°K	3 0-10V Dimming				-W Pendant wire	20 200cm
			5 5000°K	4 DALI Dimming					30 300cm