


LEAN WALL 200

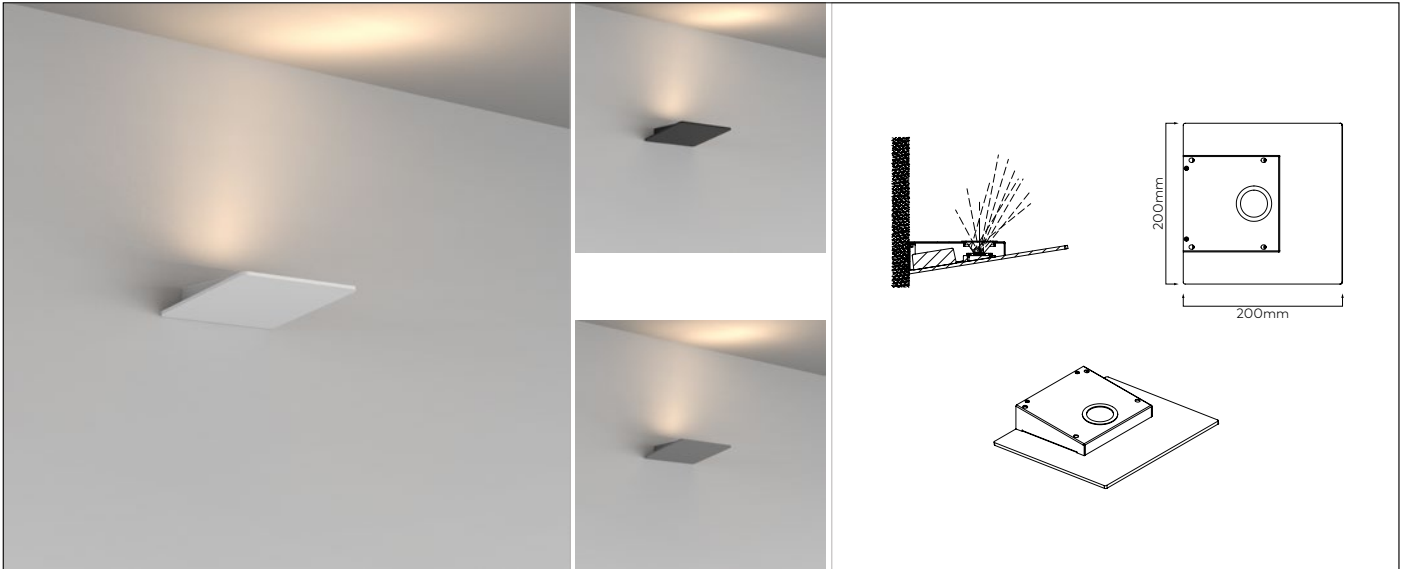


LUMINAIRE SPECIFICATION

Frame	200 x 200 mm
Mounting	Surface mount
Luminaire material	Aluminium with textured powder coat finish.
Light source	LED
Driver	Remote constant current
IP Rating	IP20

LED SPECIFICATION

LED	CREE				
Lumen output (lm)	25W	2700K	3000K	3500K	4000K
	30W	2500 lm	2600 lm	2636 lm	2639 lm
		2861 lm	2975 lm	3016 lm	3019 lm
CCT	2700K, 3000K, 3500K, 4000K				
CRI	>90Ra				
Binning	2 Step				
Optics	34° Asymmetric lens				
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data				
Driver requirement	Constant current				
Drive current / voltage	25W	700mA / 36VDC Nominal			
	30W	850mA / 36VDC Nominal			

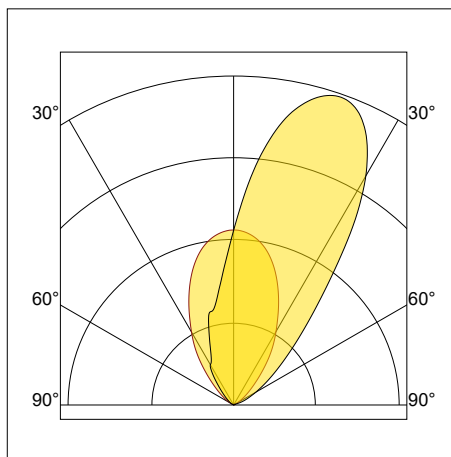

ORDERING INFORMATION

example 2590WL34.13225C

BEAM ANGLE	FINISH	LED CCT	DRIVER	VERSION
2590WL34 34° Asymmetric	1 White	2 2700K	2 Phase dimming	25C 25W CRI >90
	2 Black	3 3000K	3 0-10V dimming	30C 30W CRI >90
	7 Silver	35 3500K	4 DALI dimming	
		4 4000K		
2590WL34	.			