


CC Non-Dimming LED Driver

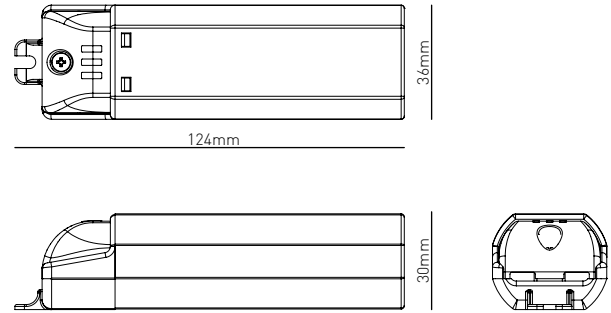

Specification

	4710.TC	4711.TC
Dimensions	124x36x30mm	124x36x30mm
Type	Constant current	Constant current
Dimming	No	No
IP Rating	IP20	IP20
Input voltage	220-240VAC	220-240VAC
Input current	0.09A	0.09A
Power factor	0.5	0.95
Output voltage	3-15V	6-17V
Output current	660mA	700mA
Output power	10W	12W
Connection	Pre-wired input and output (TOP connector)	
Safety	Short circuit and over voltage	
Compliance	Safety : EN61347-2-13.IP40 EMC : EN55015, EN61000-3-2, EN61000-4-2,3,4,5,6,8,11, EN61547	

Expected failure rate & life-time

Failure rate	tc @ Max 80°C : <0.2% / 1000hrs	
Life-time	ta 35°C	ta 50°C
	>70,000hrs	>50,000hrs

The LED Driver is designed for a minimum life-time stated above with a probability of less than 10% failure.

Ordering Information

Model

4710.TC 10W - 660mA constant current LED Driver
 4711.TC 12W - 700mA constant current LED Driver