


CC L/TE Dimming LED Driver

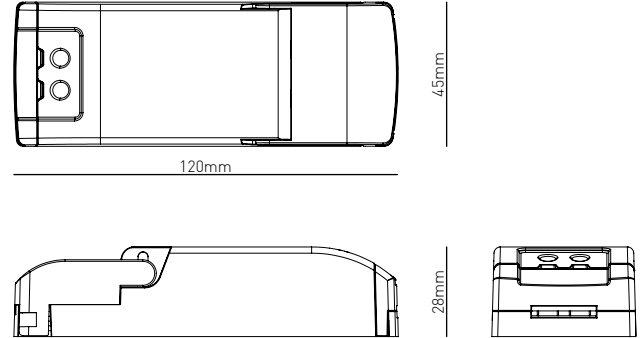

Specification

	4728.50.TC	4728.70.TC
Dimensions	120x45x28mm	120x45x28mm
Type	Constant current	Constant current
Dimming	Leading / trailing edge	Leading / trailing edge
IP Rating	IP20	IP20
Input voltage	220-240VAC	220-240VAC
Power factor	> 0.95	> 0.95
Output voltage	25-50V	18-38V
Output current	500mA	700mA
Output power	25W	25W
Connection	Pre-wired input and output (TOP connector)	
Safety	Short circuit and over voltage	
Compliance	Safety : EN61347-2-13.IP40 EMC : EN55015, EN61000-3-2, EN61000-4-2,3,4,5,6,8,11, EN61547	

Expected failure rate & life-time

Failure rate	tc @ Max 80°C : <0.2% / 1000hrs	
Life-time	ta 35°C	ta 50°C
	>70,000hrs	>50,000hrs

The LED Driver is designed for a minimum life-time stated above with a probability of less than 10% failure.

Ordering Information

Model

4728.50.TC 25W - 500mA constant current LED Driver
 4728.70.TC 25W - 700mA constant current LED Driver