


FLEX 16 VERTICAL HIGH TEMPERATURE

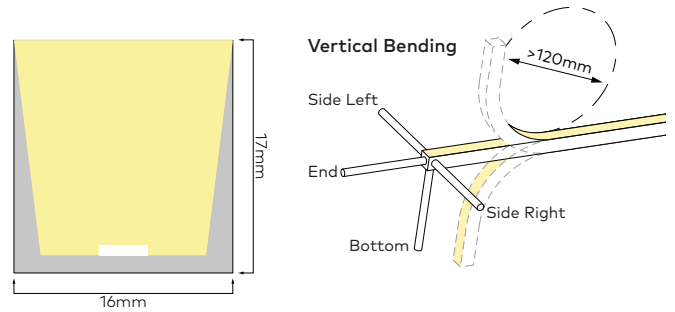

LUMINAIRE SPECIFICATION

Width	16mm
Height	17mm
Maximum length	4W/m : 5m 5W/m : 20m
Cut interval	4W/m : 62.5mm 5W/m : 50mm
Minimum bend diameter	>120mm
Material	White high temperature silicone
Mounting	Surface
IP Rating	IP67
Temperature rating	-25...80°C
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	4W/m and 5W/m options
CCT	See options table below
CRI	>80Ra
Lumen package	4W/m : 330lm/m (@3000K) 5W/m : 356lm/m (@3000K)
Binning	3 Step
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
Driver requirement	Constant voltage
Voltage	24VDC

ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63HTS16V Neon Flex 16 Vertical	1 White	B CRI >80	18 1800K	S04 4W/m S05 5W/m	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
			24 2400K				010 1m	
			27 2700K				030 3m	
			30 3000K				050 5m	
			35 3500K				100 10m	
			40 4000K					
			60 6000K					
63HTS16V	1	B			7			