




FLEX 6X12 HORIZONTAL

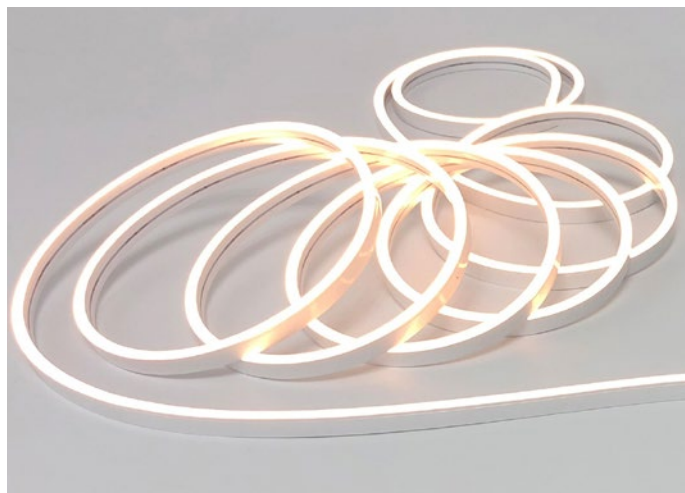

Horizontal Bending



SPECIFICATION

MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
STANDARDS	EN/AS/NZS 60598-2-1, 62031, 62471
WARRANTY	5 Years

MONO CCT

SPECIFICATION

CRI	>90 Ra
MINIMUM BEND DIAMETER	>60 mm
DIMMING REQUIREMENT	C24 PWM Output driver only V24 Voltage reduction/amplitude or PWM output driver

	LED SPECIFICATION			LUMEN PACKAGE lm/m						
	Wattage	Max. Length	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S05	5 W/m	10 m	50 mm	98	128	140	152	154	160	156
S10	10 W/m	5 m	50 mm	190	248	270	292	296	304	302
L05	5 W/m	20 m	50 mm	98	128	140	152	154	160	156
L10	10 W/m	10 m	50 mm	190	248	270	292	296	304	302

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S0612H Neon Flex 6x12 H	1 White	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	S05 5 W/m (10m max. V24) S10 10 W/m (5m max. V24) L05 5 W/m (20m max. C24) L10 10 W/m (10m max. C24)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S0612H	1				7		

HIGH OUTPUT MONO CCT

SPECIFICATION



CRI	>90 Ra
MINIMUM BEND DIAMETER	>60 mm
DIMMING REQUIREMENT	C24 PWM Output driver only V24 Voltage reduction/amplitude or PWM output driver

	LED SPECIFICATION			LUMEN PACKAGE lm/m						
	Wattage	Max. Length	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S10	10 W/m	7 m	62.5 mm	290	378	410	444	454	454	460
L10	10 W/m	15 m	50 mm	218	286	308	336	342	344	348


ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S0612HOH Neon Flex 6x12 H	1 White	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	S10 10 W/m (7m max. C24) L10 10 W/m (15m max. C24)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S0612HOH	1				7		

FLEX 6X12 HORIZONTAL

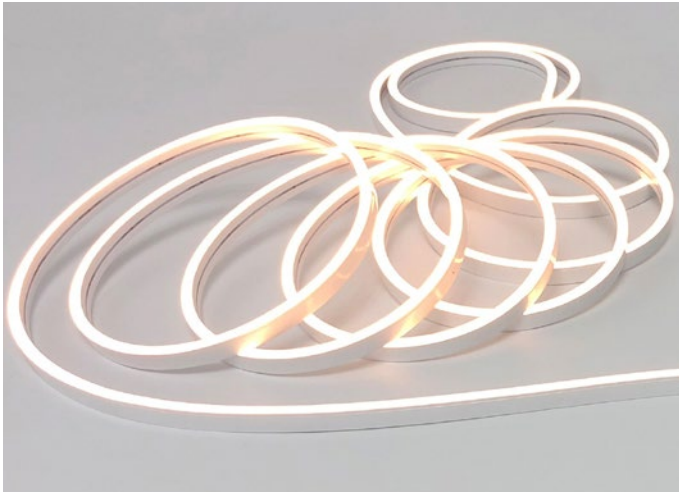

Horizontal Bending



SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
STANDARDS	EN/AS/NZS 60598-2-1, 62031, 62471
WARRANTY	5 Years

TUNABLE WHITE

SPECIFICATION

CRI	>90 Ra
MINIMUM BEND DIAMETER	>100 mm
DIMMING REQUIREMENT	C24 PWM Output driver only V24 Voltage reduction/amplitude or PWM output driver

LED SPECIFICATION				LUMEN PACKAGE lm/m						
	Wattage	Max. Length	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
CT08	2x8 W/m	5 m	50 mm	106	148	164	172	172	174	168

* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.

* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.

ORDERING INFORMATION

MODEL	JACKET	CCT	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S0612H Neon Flex 6x12 H	1 White	C18 1800K	24 2400K	CT08 2x8 W/m (5m max. V24)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX
		C24 2400K	27 2700K				010 1m	Length in mm
		C27 2700K	30 3000K				030 3m	
		C30 3000K	35 3500K				050 5m	
		C35 3500K	40 4000K				100 10m	
		C40 4000K	60 6000K					
63S0612H	1			CT08		7		

WARM DIM

SPECIFICATION

CRI	>90 Ra
MINIMUM BEND DIAMETER	>100 mm
DIMMING REQUIREMENT	VR Voltage reduction/amplitude dimming driver required (not PWM compatible)

LED SPECIFICATION				LUMEN PACKAGE lm/m	
Wattage	Max. Length	Cut Interval		2700K	3000K
12R	12 W/m	5 m	50 mm	230	250

ORDERING INFORMATION

MODEL	JACKET	CCT	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S0612H Neon Flex 6x12 H	1 White	C2718W 2700-1800K		12R 12 W/m (5m max. VR)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX
		C3018W 3000-1800K					010 1m	Length in mm
							030 3m	
							050 5m	
							100 10m	
63S0612H	1			12R		7		