




FLEX 8X5 VERTICAL DOMED

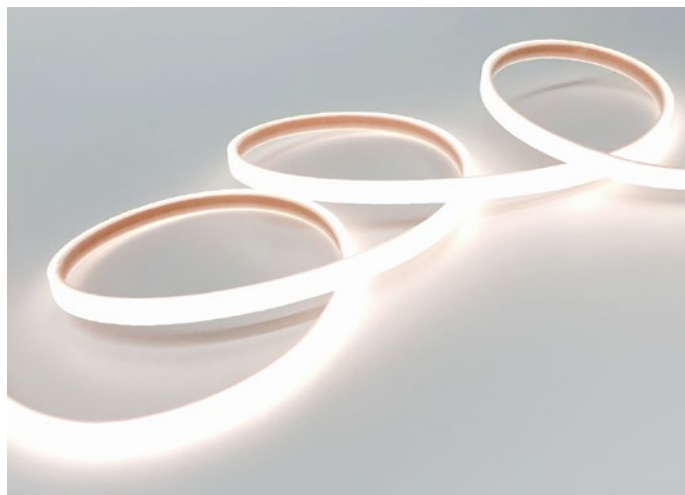

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP65
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
STANDARDS	EN/AS/NZS 60598-2-1, 62031, 62471
WARRANTY	5 Years

MONO CCT

SPECIFICATION

CRI	>90 Ra
MINIMUM BEND DIAMETER	>30 mm
DIMMING REQUIREMENT	C24 PWM Output driver only V24 Voltage reduction/amplitude or PWM output driver
ADHESIVE BACKING ^(*)	If backing is used, the flex will not fit into the aluminium profile accessory

	LED SPECIFICATION			LUMEN PACKAGE lm/m						
	Wattage	Max. Length	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
SF05	5 W/m	10 m	25 mm	356	466	510	548	558	576	568
SF10	10 W/m	7 m	25 mm	710	928	1016	1092	1112	1146	1130
SF15	15 W/m	6 m	25 mm	936	1224	1338	1440	1468	1512	1490

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	ADHESIVE BACKING	LENGTH
63S0805VD Neon Flex 8x5 VD	1 White	C18 1800K	SF05 5 W/m (10m max. V24)	E End	5 IP65	003 0.3m	A 3M Backing Included ^(*)	.XXXX Length in mm
		C24 2400K	SF10 10 W/m (7m max. V24)			010 1m		
		C27 2700K	SF15 15 W/m (6m max. V24)			030 3m		
		C30 3000K				050 5m		
		C35 3500K				100 10m		
		C40 4000K						
63S0805VD	1	C60 6000K		E	5		OPTIONAL	

SINGLE COLOUR

SPECIFICATION

MINIMUM BEND DIAMETER	>30 mm
DIMMING REQUIREMENT	C24 PWM Output driver only V24 Voltage reduction/amplitude or PWM output driver
ADHESIVE BACKING ^(*)	If backing is used, the flex will not fit into the aluminium profile accessory

	Wattage	Max. Length	Cut Interval	RED	GREEN	BLUE
S05	5 W/m	5 m	50 mm	186	548	128
S09	9 W/m	3 m	50 mm	330	986	232
S12	12 W/m	3 m	50 mm	444	1316	310
S14	14 W/m	2.5 m	50 mm	516	1532	360

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	ADHESIVE BACKING	LENGTH
63S0805VD Neon Flex 8x5 VD	1 White	RED Red	S05 5 W/m (5m max. V24)	E End	5 IP65	003 0.3m	A 3M Backing Included ^(*)	.XXXX Length in mm
		GREEN Green	S09 9 W/m (3m max. V24)			010 1m		
		BLUE Blue	S12 12 W/m (3m max. V24)			030 3m		
			S14 14 W/m (2.5m max. V24)			050 5m		
						100 10m		
63S0805VD	1			E	5		OPTIONAL	

ACCESSORIES

TYPE	Aluminium push in profile
MOUNTING	Surface mount

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S0805X	5PP Aluminium	0020 20mm
		1000 1000mm
		2000 2000mm
63S0805X	5PP	

