




FLEX HC 10X10 MULTI BEND HIGH OUTPUT



Horizontal Bending

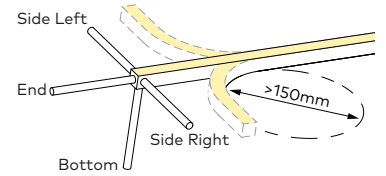

Vertical Bending

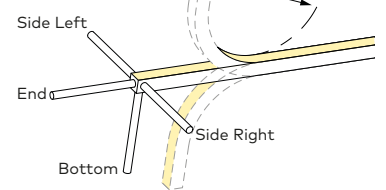

LUMINAIRE SPECIFICATION

Width	10 mm
Height	10 mm
Maximum length	4 m
Cut interval	55.6 mm
Minimum bend diameter	Vertical : Ø100 mm Horizontal : Ø150 mm
Material	Silicone with integral honeycomb anti glare feature
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	10 W/m										
CCT	See options table below										
CRI	>90Ra										
Lumen package	<table border="1"> <thead> <tr> <th>Power</th> <th>2700K</th> <th>3000K</th> <th>4000K</th> <th>6500K</th> </tr> </thead> <tbody> <tr> <td>10 W/m (4 m max.)</td> <td>130 lm/m</td> <td>140 lm/m</td> <td>147 lm/m</td> <td>145 lm/m</td> </tr> </tbody> </table>	Power	2700K	3000K	4000K	6500K	10 W/m (4 m max.)	130 lm/m	140 lm/m	147 lm/m	145 lm/m
Power	2700K	3000K	4000K	6500K							
10 W/m (4 m max.)	130 lm/m	140 lm/m	147 lm/m	145 lm/m							
Binning	3 Step										
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data										
Driver requirement	Constant voltage										
Voltage	24VDC										

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S1010HCHOM Neon Flex 10 HC	2 Black	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	S10 10 W/m (4 m max.)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1010HCHOM	2		S10		7		