
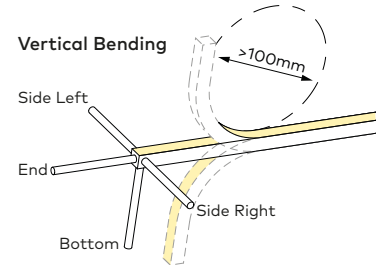


## FLEX HC 10X10 VERTICAL BEND HIGH OUTPUT



### LUMINAIRE SPECIFICATION

<b>Width</b>	10 mm
<b>Height</b>	10 mm
<b>Maximum length</b>	7 m and 15 m options
<b>Cut interval</b>	7 m max : 62.5 mm 15 m max. : 50 mm
<b>Minimum bend diameter</b>	Vertical : Ø100 mm
<b>Material</b>	Silicone with integral honeycomb anti glare feature
<b>Mounting</b>	Surface
<b>IP Rating</b>	IP67
<b>Protection</b>	UV, flame, salt and chlorine resistant
<b>Standards</b>	EN/AS/NZS 60598-2-1, 62031, 62471
<b>Warranty</b>	5 Years

### LED SPECIFICATION

<b>LED Wattage</b>	10 W/m															
<b>CCT</b>	See options table below															
<b>CRI</b>	>90Ra															
<b>Lumen package</b>	<table border="1"> <thead> <tr> <th>Power</th> <th>2700K</th> <th>3000K</th> <th>4000K</th> <th>6500K</th> </tr> </thead> <tbody> <tr> <td>10 W/m (7 m max.)</td> <td>146 lm/m</td> <td>159 lm/m</td> <td>162 lm/m</td> <td>161 lm/m</td> </tr> <tr> <td>10 W/m (15 m max.)</td> <td>110 lm/m</td> <td>120 lm/m</td> <td>122 lm/m</td> <td>126 lm/m</td> </tr> </tbody> </table>	Power	2700K	3000K	4000K	6500K	10 W/m (7 m max.)	146 lm/m	159 lm/m	162 lm/m	161 lm/m	10 W/m (15 m max.)	110 lm/m	120 lm/m	122 lm/m	126 lm/m
Power	2700K	3000K	4000K	6500K												
10 W/m (7 m max.)	146 lm/m	159 lm/m	162 lm/m	161 lm/m												
10 W/m (15 m max.)	110 lm/m	120 lm/m	122 lm/m	126 lm/m												
<b>Binning</b>	3 Step															
<b>Lifetime (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data															
<b>Driver requirement</b>	Constant voltage															
<b>Voltage</b>	24VDC															

### ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S1010HCHOV Neon Flex 10 HC	2 Black	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	S10 10 W/m (7 m max.) L10 10 W/m (15 m max.)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1010HCHOV	2				7		