
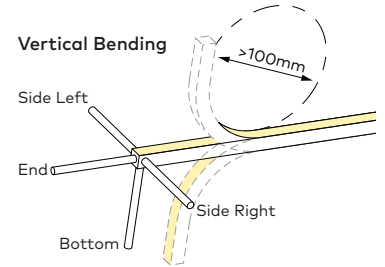


FLEX HC 10X10 VERTICAL BEND WARM DIM



LUMINAIRE SPECIFICATION

Width	10 mm
Height	10 mm
Maximum length	5 m
Cut interval	50 mm
Minimum bend diameter	Vertical : Ø100 mm
Material	Silicone with integral honeycomb anti glare feature
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	10 W/m						
CCT	See options table below						
CRI	>90Ra						
Lumen package	<table border="1"> <tr> <td>Power</td> <td>2700K</td> <td>3000K</td> </tr> <tr> <td>10 W/m (5 m max.)</td> <td>74 lm/m</td> <td>80 lm/m</td> </tr> </table>	Power	2700K	3000K	10 W/m (5 m max.)	74 lm/m	80 lm/m
Power	2700K	3000K					
10 W/m (5 m max.)	74 lm/m	80 lm/m					
Binning	3 Step						
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data						
Driver requirement	Constant voltage - Voltage reduction/amplitude dimming driver required (not PWM compatible)						
Voltage	24VDC						

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S1010HCV Neon Flex 10 HC	2 Black	C2718W 2700K - 1800K C3018W 3000K - 1800K	10R 10W/m	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1010HCV	2		10R		7		