


FLEX DARKLINE 10X10 MULTI BEND HIGH OUTPUT

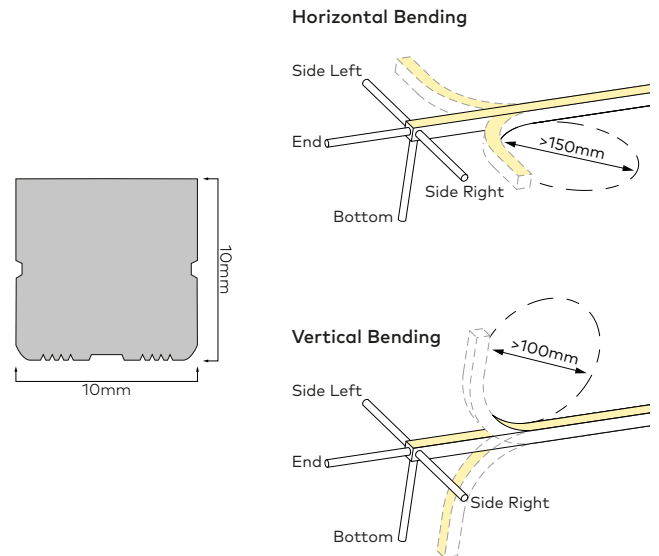

LUMINAIRE SPECIFICATION		LED SPECIFICATION					
Width	10 mm	LED Wattage	10 W/m				
Height	10 mm	CCT	See options table below				
Maximum length	4 m	CRI	>90Ra				
Cut interval	55.6 mm	Lumen package	Power	2700K	3000K	4000K	6500K
Minimum bend diameter	Horizontal : >150 mm Vertical : > 100 mm		10 W/m (4m max.)	306 lm/m	330 lm/m	336 lm/m	343 lm/m
Material	Silicone with integral anti glare feature	Binning	3 Step				
Mounting	Surface	Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data				
IP Rating	IP67	Driver requirement	Constant voltage				
Protection	UV, flame, salt and chlorine resistant	Voltage	24VDC				
Standards	EN/AS/NZS 60598-2-1, 62031, 62471						
Warranty	5 Years						

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH		
63S1010DLHOM Neon Flex 10	2 Black	C18	1800K	S10 10 W/m (4 m max.)	E End B Bottom SL Side Left SR Side Right	7 IP67	003	0.3m	.XXXX Length in mm
		C24	2400K				010	1m	
		C27	2700K				030	3m	
		C30	3000K				050	5m	
		C35	3500K				100	10m	
		C40	4000K						
C60	6000K								
63S1010DLHOM	2		S10		7				