




FLEX 15X15 HORIZONTAL

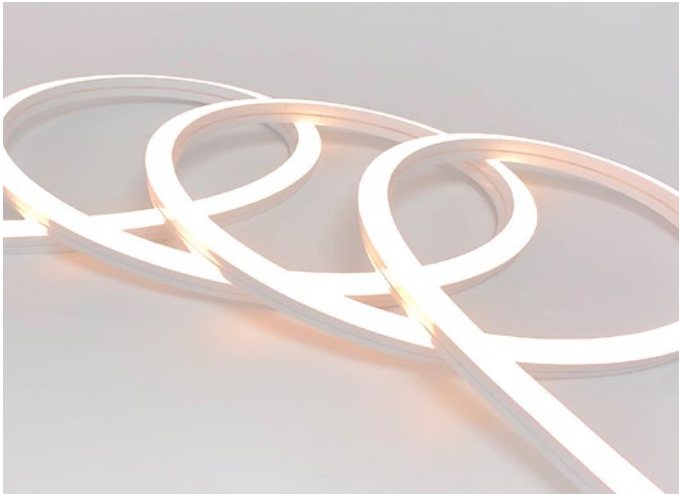

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
STANDARDS	EN/AS/NZS 60598-2-1, 62031, 62471
WARRANTY	5 Years

MONO CCT

SPECIFICATION

CRI	>90 Ra
MINIMUM BEND DIAMETER	>250 mm
DIMMING REQUIREMENT	C24 PWM Output driver only V24 Voltage reduction/amplitude or PWM output driver

	LED SPECIFICATION			LUMEN PACKAGE lm/m						
	Wattage	Max. Length	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S05	5 W/m	25 m	50 mm	178	232	254	274	280	288	284
S12	12 W/m	15 m	50 mm	410	538	588	632	644	664	654

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515H Neon Flex 15x15 H	1 White	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	S05 5 W/m (25m max. C24) S12 12 W/m (15m max. C24)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1515H	1				7		

HIGH OUTPUT MONO CCT

SPECIFICATION



CRI	>90 Ra
MINIMUM BEND DIAMETER	>250 mm
DIMMING REQUIREMENT	C24 PWM Output driver only V24 Voltage reduction/amplitude or PWM output driver

	LED SPECIFICATION			LUMEN PACKAGE lm/m						
	Wattage	Max. Length	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
L12	12 W/m	15 m	50 mm	474	618	668	728	742	740	752
S13	13.5 W/m	5 m	62.5 mm	708	924	1000	1088	1110	1108	1126


ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515HOH Neon Flex 15x15 H	1 White	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	L12 12 W/m (15m max. C24) S13 13.5 W/m (5m max. C24)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1515HOH	1				7		

FLEX 15X15 HORIZONTAL

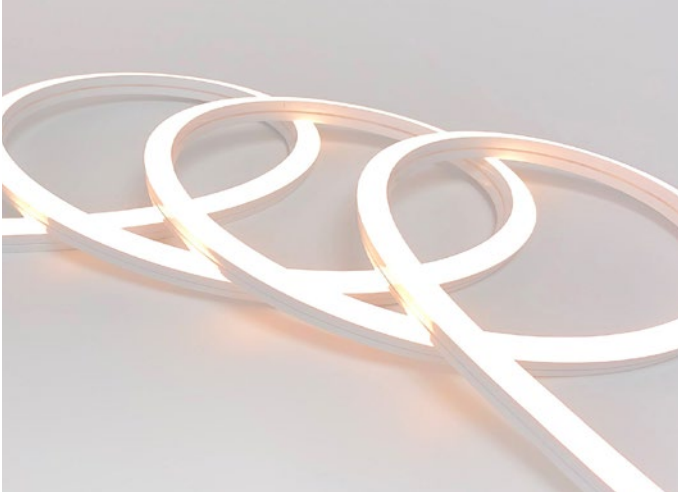

Horizontal Bending



SPECIFICATION

MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
STANDARDS	EN/AS/NZS 60598-2-1, 62031, 62471
WARRANTY	5 Years

TUNABLE WHITE

SPECIFICATION

CRI	>90 Ra
MINIMUM BEND DIAMETER	>250 mm
DIMMING REQUIREMENT	C24 PWM Output driver only V24 Voltage reduction/amplitude or PWM output driver

	LED SPECIFICATION			LUMEN PACKAGE lm/m						
	Wattage	Max. Length	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
CT10	2x9.6 W/m	7 m	62.5 mm	306	428	470	494	498	502	522

* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.

ORDERING INFORMATION

MODEL	JACKET	CCT	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515H Neon Flex 15x15 H	1 White	C18 1800K	24 2400K	CT10 2x9.6 W/m (7m max. V24)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
		C24 2400K	27 2700K				010 1m	
		C27 2700K	30 3000K				030 3m	
		C30 3000K	35 3500K				050 5m	
		C35 3500K	40 4000K				100 10m	
		C40 4000K	60 6000K					
63S1515H	1			CT10		7		

TUNABLE WHITE - HIGH OUTPUT

SPECIFICATION

CRI	>90 Ra
MINIMUM BEND DIAMETER	>250 mm
DIMMING REQUIREMENT	C24 PWM Output driver only V24 Voltage reduction/amplitude or PWM output driver




	LED SPECIFICATION			LUMEN PACKAGE lm/m						
	Wattage	Max. Length	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
CT10	2x10 W/m	4 m	83.3 mm	486	682	748	786	794	802	834
CT13	2x13 W/m	3 m	83.3 mm	634	886	974	1022	1032	1042	1084

* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.

ORDERING INFORMATION

MODEL	JACKET	CCT	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515HOH Neon Flex 15x15 H	1 White	C18 1800K	24 2400K	CT10 2x10 W/m (4m max. V24) CT13 2x13 W/m (3m max. V24)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
		C24 2400K	27 2700K				010 1m	
		C27 2700K	30 3000K				030 3m	
		C30 3000K	35 3500K				050 5m	
		C35 3500K	40 4000K				100 10m	
		C40 4000K	60 6000K					
63S1515HOH	1					7		

FLEX 15X15 HORIZONTAL

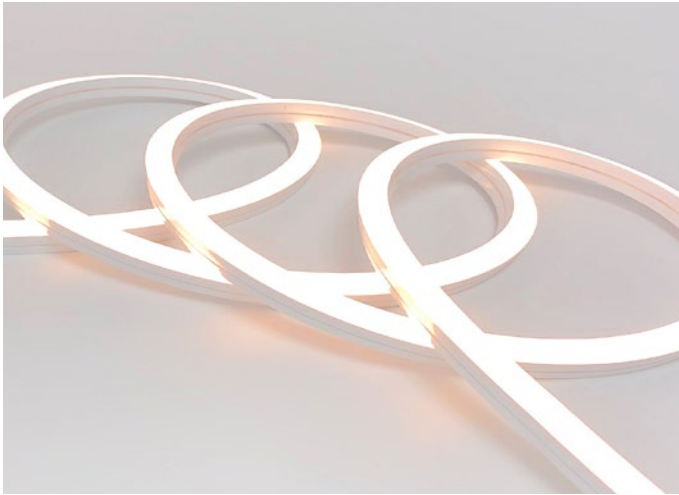

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
STANDARDS	EN/AS/NZS 60598-2-1, 62031, 62471
WARRANTY	5 Years

WARM DIM

SPECIFICATION

CRI	>90 Ra
MINIMUM BEND DIAMETER	>300 mm
DIMMING REQUIREMENT	VR Voltage reduction/amplitude dimming driver required (not PWM compatible)

	LED SPECIFICATION			LUMEN PACKAGE lm/m	
	Wattage	Max. Length	Cut Interval	2700K	3000K
14R	14 W/m	5 m	83.3 mm	494	538

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515H Neon Flex 15x15 H	1 White	C2718W 2700-1800K C3018W 3000-1800K	14R 14 W/m (5m max. VR)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1515H	1		14R		7		

RGB

SPECIFICATION

MINIMUM BEND DIAMETER	>300 mm
-----------------------	---------

	LED SPECIFICATION			LUMEN PACKAGE lm/m		
	Wattage	Max. Length	Cut Interval	RED	GREEN	BLUE
S12	4W /ch	7 m	62.5 mm	84	256	56

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515H Neon Flex 15x15 H	1 White	RGB RGB	S12 12 W/m (7m max. V24)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1515H	1				7		