




FLEX 15X15 MULTI

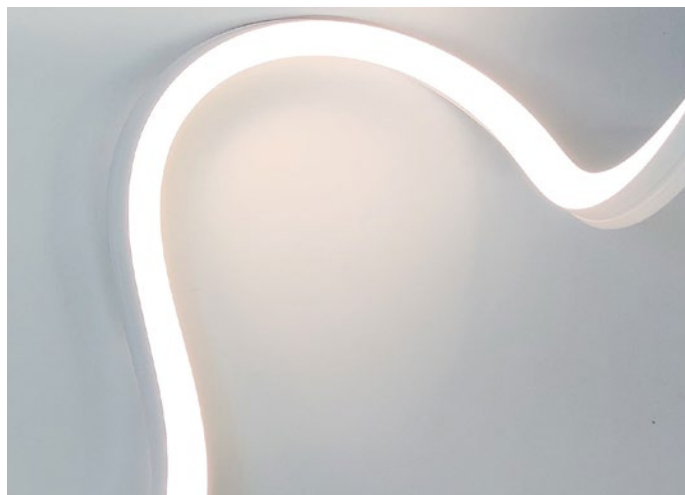

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
STANDARDS	EN/AS/NZS 60598-2-1, 62031, 62471
WARRANTY	5 Years

MONO CCT

SPECIFICATION

CRI	>90 Ra
MINIMUM BEND DIAMETER	>300mm
DIMMING REQUIREMENT	C24 PWM Output driver only V24 Voltage reduction/amplitude or PWM output driver

	LED SPECIFICATION			LUMEN PACKAGE lm/m						
	Wattage	Max. Length	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S05	5 W/m	8 m	50 mm	196	256	280	302	308	318	312
S10	10 W/m	5 m	50 mm	382	498	546	588	598	616	608

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515M Neon Flex 15x15 M	1 White	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	S05 5 W/m (8m max. V24) S10 10 W/m (5m max. V24)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1515M	1				7		

HIGH OUTPUT MONO CCT

SPECIFICATION



CRI	>90 Ra
MINIMUM BEND DIAMETER	>300mm
DIMMING REQUIREMENT	C24 PWM Output driver only V24 Voltage reduction/amplitude or PWM output driver

	LED SPECIFICATION			LUMEN PACKAGE lm/m						
	Wattage	Max. Length	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S12	12 W/m	5 m	50 mm	530	694	750	816	832	856	844

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515HOM Neon Flex 15x15 M	1 White	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	S12 12 W/m (5m max. V24)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1515HOM	1		S12		7		

FLEX 15X15 MULTI



SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
STANDARDS	EN/AS/NZS 60598-2-1, 62031, 62471
WARRANTY	5 Years

TUNABLE WHITE

SPECIFICATION

CRI	>90 Ra
MINIMUM BEND DIAMETER	>300 mm
DIMMING REQUIREMENT	C24 PWM Output driver only V24 Voltage reduction/amplitude or PWM output driver

LED SPECIFICATION				LUMEN PACKAGE lm/m						
Wattage	Max. Length	Cut Interval		1800K	2400K	2700K	3000K	3500K	4000K	6000K
CT08	2x8 W/m	5 m	50 mm	244	342	376	394	398	402	390

* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.

ORDERING INFORMATION

MODEL	JACKET	CCT	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515M Neon Flex 15x15 M	1 White	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 60 6000K	CT08 2x8 W/m (5m max. V24)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1515M	1			CT08		7		