



FLEX 15X15 VERTICAL



SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
STANDARDS	EN/AS/NZS 60598-2-1, 62031, 62471
WARRANTY	5 Years

MONO CCT

SPECIFICATION

CRI	>90 Ra
MINIMUM BEND DIAMETER	>250 mm
DIMMING REQUIREMENT	C24 PWM Output driver only V24 Voltage reduction/amplitude or PWM output driver

	LED SPECIFICATION			LUMEN PACKAGE lm/m						
	Wattage	Max. Length	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S05	5 W/m	25 m	50 mm	154	202	220	236	242	250	246
S12	12 W/m	15 m	50 mm	356	446	510	548	558	576	568

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515V Neon Flex 15x15 V	1 White	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	S05 5 W/m (25m max. C24) S12 12 W/m (15m max. C24)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1515V	1				7		

HIGH OUTPUT MONO CCT

SPECIFICATION




CRI	>90 Ra
MINIMUM BEND DIAMETER	>250 mm
DIMMING REQUIREMENT	C24 PWM Output driver only V24 Voltage reduction/amplitude or PWM output driver

	LED SPECIFICATION			LUMEN PACKAGE lm/m						
	Wattage	Max. Length	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
L12	12 W/m	15 m	50 mm	410	538	580	632	644	644	654
S13	13.5 W/m	5 m	62.5 mm	614	802	868	944	962	962	978

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515HOV Neon Flex 15x15 V	1 White	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	L12 12 W/m (15m max. C24) S13 13.5 W/m (5m max. C24)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1515HOV	1				7		

FLEX 15X15 VERTICAL

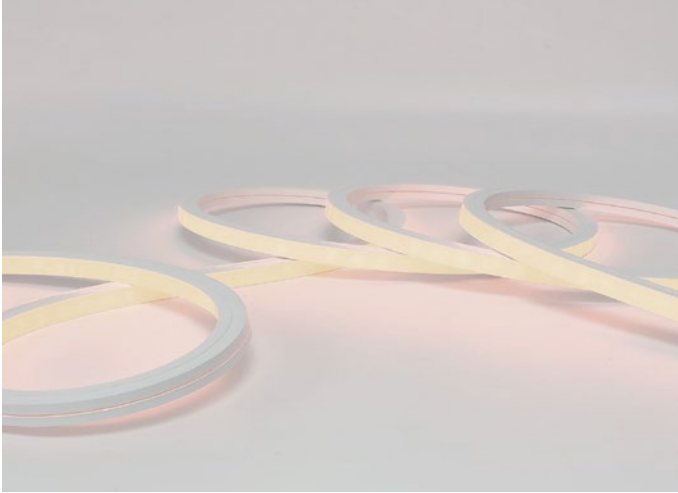

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
STANDARDS	EN/AS/NZS 60598-2-1, 62031, 62471
WARRANTY	5 Years

TUNABLE WHITE

SPECIFICATION

CRI	>90 Ra
MINIMUM BEND DIAMETER	>250 mm
DIMMING REQUIREMENT	C24 PWM Output driver only V24 Voltage reduction/amplitude or PWM output driver

	LED SPECIFICATION			LUMEN PACKAGE lm/m						
	Wattage	Max. Length	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
CT10	2x9.6 W/m	7 m	62.5 mm	266	372	408	428	432	436	454

* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.

ORDERING INFORMATION

MODEL	JACKET	CCT	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515V Neon Flex 15x15 V	1 White	C18 1800K	24 2400K	CT10 2x9.6 W/m (7m max. V24)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
		C24 2400K	27 2700K				010 1m	
		C27 2700K	30 3000K				030 3m	
		C30 3000K	35 3500K				050 5m	
		C35 3500K	40 4000K				100 10m	
		C40 4000K	60 6000K					
63S1515V	1			CT10		7		

TUNABLE WHITE - HIGH OUTPUT

SPECIFICATION

CRI	>90 Ra
MINIMUM BEND DIAMETER	>250 mm
DIMMING REQUIREMENT	C24 PWM Output driver only V24 Voltage reduction/amplitude or PWM output driver



	LED SPECIFICATION			LUMEN PACKAGE lm/m						
	Wattage	Max. Length	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
CT10	2x10 W/m	4 m	83.3 mm	424	592	652	684	690	696	724
CT13	2x13 W/m	3 m	83.3 mm	550	768	844	888	896	904	942

* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.

ORDERING INFORMATION

MODEL	JACKET	CCT	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515HOV Neon Flex 15x15 V	1 White	C18 1800K	24 2400K	CT10 2x10 W/m (4m max. V24) CT13 2x13 W/m (3m max. V24)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
		C24 2400K	27 2700K				010 1m	
		C27 2700K	30 3000K				030 3m	
		C30 3000K	35 3500K				050 5m	
		C35 3500K	40 4000K				100 10m	
		C40 4000K	60 6000K					
63S1515HOV	1					7		

FLEX 15X15 VERTICAL



SPECIFICATION

MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
STANDARDS	EN/AS/NZS 60598-2-1, 62031, 62471
WARRANTY	5 Years

WARM DIM

SPECIFICATION

CRI	>90 Ra
MINIMUM BEND DIAMETER	>250 mm
DIMMING REQUIREMENT	VR Voltage reduction/amplitude dimming driver required (not PWM compatible)

	LED SPECIFICATION			LUMEN PACKAGE lm/m	
	Wattage	Max. Length	Cut Interval	2700K	3000K
14R	14 W/m	5 m	83.33 mm	434	472

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515V Neon Flex 15x15 V	1 White	C2718W 2700-1800K C3018W 3000-1800K	14R 14 W/m (5m max. VR)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1515V	1		14R		7		

RGB / RGBW

SPECIFICATION



MINIMUM BEND DIAMETER >300 mm

		LED SPECIFICATION			LUMEN PACKAGE lm/m					
		Wattage	Max. Length	Cut Interval	RED	GREEN	BLUE	2700K	3000K	4000K
RGB	L12	4W /ch	15 m	100 mm	72	194	44	-	-	-
RGBW	H16	4W /ch	5 m	62.5 mm	72	194	44	168	182	190
RGBW	L16	4W /ch	11 m	100 mm	72	194	44	168	182	190

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515V Neon Flex 15x15 V	1 White	RGB RGB RGB RGBW RGBW27 RGBW(2700K) RGBW30 RGBW(3000K) RGBW40 RGBW(4000K)	L12 12 W/m (15m max. C24) H16 16 W/m (5m max. V24) L16 16 W/m (11m max. C24)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1515V	1				7		

FLEX 15X15 VERTICAL



SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
STANDARDS	EN/AS/NZS 60598-2-1, 62031, 62471
WARRANTY	5 Years

PIXEL - MONO CCT

SPECIFICATION

CRI	>90 Ra
MINIMUM BEND DIAMETER	>300 mm
DIMMING REQUIREMENT	DMX

	LED SPECIFICATION					LUMEN PACKAGE lm/m						
	Wattage	Pixels	DMX Addr	Max. Length	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
DMX10P13	13.5 W/m	10 /m	10 /m	7 m	100 mm	356	466	504	548	558	572	568

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515V Neon Flex 15x15 V	1 White	C18 1800K	DMX10P13 13.5 W/m - 10 Pix/m (7m max.)	E End	7 IP67	003 0.3m	.XXXX Length in mm
		C24 2400K		B Bottom		010 1m	
		C27 2700K		SL Side Left		030 3m	
		C30 3000K		SR Side Right		050 5m	
		C35 3500K				100 10m	
		C40 4000K					
		C60 6000K					
63S1515V	1		DMX10P13		7		

PIXEL - TUNABLE WHITE

SPECIFICATION



CRI	>90 Ra
MINIMUM BEND DIAMETER	>300 mm
DIMMING REQUIREMENT	DMX

	LED SPECIFICATION					LUMEN PACKAGE lm/m						
	Wattage	Pixels	DMX Addr	Max. Length	Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
DMX10P13	13.5 W/m	10 /m	20 /m	7 m	100 mm	166	232	256	268	270	272	286

ORDERING INFORMATION

MODEL	JACKET	CCT	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515V Neon Flex 15x15 V	1 White	C18 1800K	24 2400K	DMX10P13 13.5 W/m - 10 Pix/m (7m max.)	E End	7 IP67	003 0.3m	.XXXX Length in mm
		C24 2400K	27 2700K		B Bottom		010 1m	
		C27 2700K	30 3000K		SL Side Left		030 3m	
		C30 3000K	35 3500K		SR Side Right		050 5m	
		C35 3500K	40 4000K				100 10m	
		C40 4000K	60 6000K					
63S1515V	1			DMX10P13		7		

FLEX 15X15 VERTICAL



SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
STANDARDS	EN/AS/NZS 60598-2-1, 62031, 62471
WARRANTY	5 Years

PIXEL - RGB

SPECIFICATION

MINIMUM BEND DIAMETER >300 mm

DIMMING REQUIREMENT DMX

	LED SPECIFICATION					LUMEN PACKAGE lm/m		
	Pixels	DMX Addr.	Wattage	Max. Length	Cut Interval	RED	GREEN	BLUE
DMX02P14	2 /m	6 /m	14 W/m	7 m	500 mm	50	134	32
DMX10P14	10 /m	30 /m	14 W/m	7 m	100 mm	50	134	32

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515V Neon Flex 15x15 V	1 White	RGB RGB	DMX02P14 14 W/m - 2 Pix/m (7m max.) DMX10P14 14 W/m - 10 Pix/m (7m max.)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1515V	1				7		

PIXEL - RGBW

SPECIFICATION

MINIMUM BEND DIAMETER >300 mm

DIMMING REQUIREMENT DMX

	LED SPECIFICATION					LUMEN PACKAGE lm/m					
	Pixels	DMX Addr.	Wattage	Max. Length	Cut Interval	RED	GREEN	BLUE	2700K	3000K	4000K
DMX10P16	10 /m	40 /m	16 W/m	7 m	100 mm	36	96	22	84	92	96

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH
63S1515V Neon Flex 15x15 V	1 White	RGBW27 RGBW(2700K) RGBW30 RGBW(3000K) RGBW40 RGBW(4000K)	DMX10P16 16 W/m - 10 Pix/m (7m max.)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1515V	1		DMX10P16		7		