



## FLEX 16 COVE

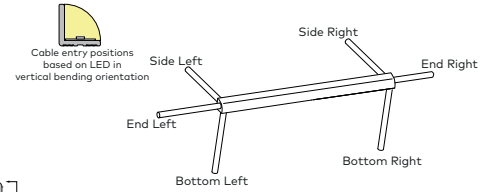

### SPECIFICATION

|                           |                                                       |
|---------------------------|-------------------------------------------------------|
| <b>MATERIAL</b>           | Silicone                                              |
| <b>MOUNTING</b>           | Surface                                               |
| <b>IP RATING</b>          | IP67                                                  |
| <b>BINNING</b>            | 3 Step                                                |
| <b>LIFETIME (L70)</b>     | 50,000hrs based on LM-80 & TM-21 applicable test data |
| <b>DRIVER REQUIREMENT</b> | 24VDC Constant voltage                                |
| <b>PROTECTION</b>         | UV, flame, salt and chlorine resistant                |
| <b>STANDARDS</b>          | EN/AS/NZS 60598-2-1, 62031, 62471                     |
| <b>WARRANTY</b>           | 5 Years                                               |

## MONO CCT

### SPECIFICATION

|                              |                                                                                    |
|------------------------------|------------------------------------------------------------------------------------|
| <b>CRI</b>                   | >90 Ra                                                                             |
| <b>MINIMUM BEND DIAMETER</b> | >250 mm                                                                            |
| <b>DIMMING REQUIREMENT</b>   | C24 PWM Output driver only<br>V24 Voltage reduction/amplitude or PWM output driver |

|            | LED SPECIFICATION |             |              | LUMEN PACKAGE lm/m |       |       |       |       |       |       |
|------------|-------------------|-------------|--------------|--------------------|-------|-------|-------|-------|-------|-------|
|            | Wattage           | Max. Length | Cut Interval | 1800K              | 2400K | 2700K | 3000K | 3500K | 4000K | 6000K |
| <b>S05</b> | 5 W/m             | 25 m        | 50 mm        | 228                | 298   | 326   | 352   | 358   | 368   | 364   |
| <b>S12</b> | 12 W/m            | 15 m        | 50 mm        | 526                | 688   | 754   | 810   | 826   | 852   | 838   |

### ORDERING INFORMATION

| MODEL                           | JACKET         | CCT                                                                                                                                      | LED TYPE                                                            | CABLE ENTRY                                                                                                                                 | IP RATING     | CABLE LENGTH                                                                         | LENGTH                       |
|---------------------------------|----------------|------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------------------------------------------------------------------------|------------------------------|
| <b>63S16C</b><br>Neon Flex 16 C | <b>1</b> White | <b>C18</b> 1800K<br><b>C24</b> 2400K<br><b>C27</b> 2700K<br><b>C30</b> 3000K<br><b>C35</b> 3500K<br><b>C40</b> 4000K<br><b>C60</b> 6000K | <b>S05</b> 5 W/m (25m max. C24)<br><b>S12</b> 12 W/m (15m max. C24) | <b>BL</b> Bottom Left<br><b>BR</b> Bottom Right<br><b>EL</b> End Left<br><b>ER</b> End Right<br><b>SL</b> Side Left<br><b>SR</b> Side Right | <b>7</b> IP67 | <b>003</b> 0.3m<br><b>010</b> 1m<br><b>030</b> 3m<br><b>050</b> 5m<br><b>100</b> 10m | <b>.XXXX</b><br>Length in mm |
| <b>63S16C</b>                   | <b>1</b>       |                                                                                                                                          |                                                                     |                                                                                                                                             | <b>7</b>      |                                                                                      |                              |

## HIGH OUTPUT MONO CCT

### SPECIFICATION



|                              |                                                                                    |
|------------------------------|------------------------------------------------------------------------------------|
| <b>CRI</b>                   | >90 Ra                                                                             |
| <b>MINIMUM BEND DIAMETER</b> | >250 mm                                                                            |
| <b>DIMMING REQUIREMENT</b>   | C24 PWM Output driver only<br>V24 Voltage reduction/amplitude or PWM output driver |

|            | LED SPECIFICATION |             |              | LUMEN PACKAGE lm/m |       |       |       |       |       |       |
|------------|-------------------|-------------|--------------|--------------------|-------|-------|-------|-------|-------|-------|
|            | Wattage           | Max. Length | Cut Interval | 1800K              | 2400K | 2700K | 3000K | 3500K | 4000K | 6000K |
| <b>L12</b> | 12 W/m            | 17 m        | 50 mm        | 606                | 794   | 858   | 932   | 952   | 952   | 966   |
| <b>S13</b> | 13.5 W/m          | 5 m         | 62.5 mm      | 906                | 1186  | 1284  | 1396  | 1422  | 1424  | 1444  |

### ORDERING INFORMATION

| MODEL                             | JACKET         | CCT                                                                                                                                      | LED TYPE                                                             | CABLE ENTRY                                                                                                                                 | IP RATING     | CABLE LENGTH                                                                         | LENGTH                       |
|-----------------------------------|----------------|------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------------------------------------------------------------------------|------------------------------|
| <b>63S16HOC</b><br>Neon Flex 16 C | <b>1</b> White | <b>C18</b> 1800K<br><b>C24</b> 2400K<br><b>C27</b> 2700K<br><b>C30</b> 3000K<br><b>C35</b> 3500K<br><b>C40</b> 4000K<br><b>C60</b> 6000K | <b>L12</b> 12 W/m (1m max. C24)<br><b>S13</b> 13.5 W/m (5m max. C24) | <b>BL</b> Bottom Left<br><b>BR</b> Bottom Right<br><b>EL</b> End Left<br><b>ER</b> End Right<br><b>SL</b> Side Left<br><b>SR</b> Side Right | <b>7</b> IP67 | <b>003</b> 0.3m<br><b>010</b> 1m<br><b>030</b> 3m<br><b>050</b> 5m<br><b>100</b> 10m | <b>.XXXX</b><br>Length in mm |
| <b>63S16HOC</b>                   | <b>1</b>       |                                                                                                                                          |                                                                      |                                                                                                                                             | <b>7</b>      |                                                                                      |                              |

## FLEX 16 COVE

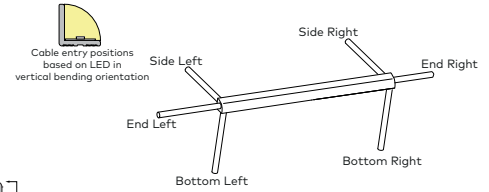

### SPECIFICATION

|                           |                                                       |
|---------------------------|-------------------------------------------------------|
| <b>MATERIAL</b>           | Silicone                                              |
| <b>MOUNTING</b>           | Surface                                               |
| <b>IP RATING</b>          | IP67                                                  |
| <b>BINNING</b>            | 3 Step                                                |
| <b>LIFETIME (L70)</b>     | 50,000hrs based on LM-80 & TM-21 applicable test data |
| <b>DRIVER REQUIREMENT</b> | 24VDC Constant voltage                                |
| <b>PROTECTION</b>         | UV, flame, salt and chlorine resistant                |
| <b>STANDARDS</b>          | EN/AS/NZS 60598-2-1, 62031, 62471                     |
| <b>WARRANTY</b>           | 5 Years                                               |

## TUNABLE WHITE

### SPECIFICATION

|                              |                                                                                    |
|------------------------------|------------------------------------------------------------------------------------|
| <b>CRI</b>                   | >90 Ra                                                                             |
| <b>MINIMUM BEND DIAMETER</b> | >250 mm                                                                            |
| <b>DIMMING REQUIREMENT</b>   | C24 PWM Output driver only<br>V24 Voltage reduction/amplitude or PWM output driver |

|             | LED SPECIFICATION |             |              | LUMEN PACKAGE lm/m |       |       |       |       |       |       |
|-------------|-------------------|-------------|--------------|--------------------|-------|-------|-------|-------|-------|-------|
|             | Wattage           | Max. Length | Cut Interval | 1800K              | 2400K | 2700K | 3000K | 3500K | 4000K | 6000K |
| <b>CT10</b> | 2x9.6 W/m         | 7 m         | 62.5 mm      | 392                | 548   | 604   | 634   | 640   | 646   | 670   |

\* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.

### ORDERING INFORMATION

| MODEL                           | JACKET         | CCT                                                                                                                  | CCT                                                                                                            | LED TYPE                            | CABLE ENTRY                                                                                                                                 | IP RATING     | CABLE LENGTH                                                                         | LENGTH                       |
|---------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------------------------------------------------------------------------|------------------------------|
| <b>63S16C</b><br>Neon Flex 16 C | <b>1</b> White | <b>C18</b> 1800K<br><b>C24</b> 2400K<br><b>C27</b> 2700K<br><b>C30</b> 3000K<br><b>C35</b> 3500K<br><b>C40</b> 4000K | <b>24</b> 2400K<br><b>27</b> 2700K<br><b>30</b> 3000K<br><b>35</b> 3500K<br><b>40</b> 4000K<br><b>60</b> 6000K | <b>CT10</b> 2x9.6 W/m (7m max. V24) | <b>BL</b> Bottom Left<br><b>BR</b> Bottom Right<br><b>EL</b> End Left<br><b>ER</b> End Right<br><b>SL</b> Side Left<br><b>SR</b> Side Right | <b>7</b> IP67 | <b>003</b> 0.3m<br><b>010</b> 1m<br><b>030</b> 3m<br><b>050</b> 5m<br><b>100</b> 10m | <b>.XXXX</b><br>Length in mm |
| <b>63S16C</b>                   | <b>1</b>       |                                                                                                                      |                                                                                                                | <b>CT10</b>                         |                                                                                                                                             | <b>7</b>      |                                                                                      |                              |

## TUNABLE WHITE - HIGH OUTPUT

### SPECIFICATION

|                              |                                                                                    |
|------------------------------|------------------------------------------------------------------------------------|
| <b>CRI</b>                   | >90 Ra                                                                             |
| <b>MINIMUM BEND DIAMETER</b> | >250 mm                                                                            |
| <b>DIMMING REQUIREMENT</b>   | C24 PWM Output driver only<br>V24 Voltage reduction/amplitude or PWM output driver |



|             | LED SPECIFICATION |             |              | LUMEN PACKAGE lm/m |       |       |       |       |       |       |
|-------------|-------------------|-------------|--------------|--------------------|-------|-------|-------|-------|-------|-------|
|             | Wattage           | Max. Length | Cut Interval | 1800K              | 2400K | 2700K | 3000K | 3500K | 4000K | 6000K |
| <b>CT10</b> | 2x10 W/m          | 4 m         | 83.3 mm      | 624                | 874   | 960   | 1010  | 1018  | 1028  | 1070  |
| <b>CT13</b> | 2x13 W/m          | 3 m         | 83.3 mm      | 812                | 1138  | 1250  | 1312  | 1324  | 1338  | 1390  |

\* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.

### ORDERING INFORMATION

| MODEL                             | JACKET         | CCT                                                                                                                  | CCT                                                                                                            | LED TYPE                                                                 | CABLE ENTRY                                                                                                                                 | IP RATING     | CABLE LENGTH                                                                         | LENGTH                       |
|-----------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------------------------------------------------------------------------|------------------------------|
| <b>63S16HOC</b><br>Neon Flex 16 C | <b>1</b> White | <b>C18</b> 1800K<br><b>C24</b> 2400K<br><b>C27</b> 2700K<br><b>C30</b> 3000K<br><b>C35</b> 3500K<br><b>C40</b> 4000K | <b>24</b> 2400K<br><b>27</b> 2700K<br><b>30</b> 3000K<br><b>35</b> 3500K<br><b>40</b> 4000K<br><b>60</b> 6000K | <b>CT10</b> 2x10 W/m (4m max. V24)<br><b>CT13</b> 2x13 W/m (3m max. V24) | <b>BL</b> Bottom Left<br><b>BR</b> Bottom Right<br><b>EL</b> End Left<br><b>ER</b> End Right<br><b>SL</b> Side Left<br><b>SR</b> Side Right | <b>7</b> IP67 | <b>003</b> 0.3m<br><b>010</b> 1m<br><b>030</b> 3m<br><b>050</b> 5m<br><b>100</b> 10m | <b>.XXXX</b><br>Length in mm |
| <b>63S16HOC</b>                   | <b>1</b>       |                                                                                                                      |                                                                                                                |                                                                          |                                                                                                                                             | <b>7</b>      |                                                                                      |                              |

## FLEX 16 COVE

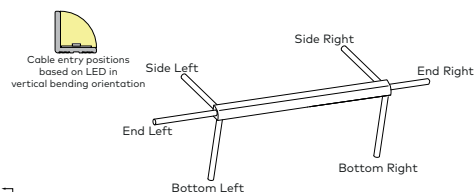

### SPECIFICATION

|                           |                                                       |
|---------------------------|-------------------------------------------------------|
| <b>MATERIAL</b>           | Silicone                                              |
| <b>MOUNTING</b>           | Surface                                               |
| <b>IP RATING</b>          | IP67                                                  |
| <b>BINNING</b>            | 3 Step                                                |
| <b>LIFETIME (L70)</b>     | 50,000hrs based on LM-80 & TM-21 applicable test data |
| <b>DRIVER REQUIREMENT</b> | 24VDC Constant voltage                                |
| <b>PROTECTION</b>         | UV, flame, salt and chlorine resistant                |
| <b>STANDARDS</b>          | EN/AS/NZS 60598-2-1, 62031, 62471                     |
| <b>WARRANTY</b>           | 5 Years                                               |

## WARM DIM

### SPECIFICATION

|                              |                                                                                |
|------------------------------|--------------------------------------------------------------------------------|
| <b>CRI</b>                   | >90 Ra                                                                         |
| <b>MINIMUM BEND DIAMETER</b> | >250 mm                                                                        |
| <b>DIMMING REQUIREMENT</b>   | VR Voltage reduction/amplitude dimming driver required<br>(not PWM compatible) |

|            | LED SPECIFICATION |             |              | LUMEN PACKAGE lm/m |       |
|------------|-------------------|-------------|--------------|--------------------|-------|
|            | Wattage           | Max. Length | Cut Interval | 2700K              | 3000K |
| <b>14R</b> | 14 W/m            | 5 m         | 83.33 mm     | 640                | 696   |

### ORDERING INFORMATION

| MODEL                           | JACKET         | CCT                                                  | LED TYPE                       | CABLE ENTRY                                                                                                                                 | IP RATING     | CABLE LENGTH                                                                         | LENGTH                       |
|---------------------------------|----------------|------------------------------------------------------|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------------------------------------------------------------------------|------------------------------|
| <b>63S16C</b><br>Neon Flex 16 C | <b>1</b> White | <b>C2718W</b> 2700-1800K<br><b>C3018W</b> 3000-1800K | <b>14R</b> 14 W/m (5m max. VR) | <b>BL</b> Bottom Left<br><b>BR</b> Bottom Right<br><b>EL</b> End Left<br><b>ER</b> End Right<br><b>SL</b> Side Left<br><b>SR</b> Side Right | <b>7</b> IP67 | <b>003</b> 0.3m<br><b>010</b> 1m<br><b>030</b> 3m<br><b>050</b> 5m<br><b>100</b> 10m | <b>.XXXX</b><br>Length in mm |
| <b>63S16C</b>                   | <b>1</b>       |                                                      | <b>14R</b>                     |                                                                                                                                             | <b>7</b>      |                                                                                      |                              |

## RGB / RGBW

### SPECIFICATION



|                              |         |
|------------------------------|---------|
| <b>MINIMUM BEND DIAMETER</b> | >300 mm |
|------------------------------|---------|

|             |     | LED SPECIFICATION |             |              | LUMEN PACKAGE lm/m |       |      |       |       |       |
|-------------|-----|-------------------|-------------|--------------|--------------------|-------|------|-------|-------|-------|
|             |     | Wattage           | Max. Length | Cut Interval | RED                | GREEN | BLUE | 2700K | 3000K | 4000K |
| <b>RGB</b>  | L12 | 4W /ch            | 15 m        | 100 mm       | 108                | 288   | 64   | -     | -     | -     |
| <b>RGBW</b> | L16 | 4W /ch            | 11 m        | 100 mm       | 108                | 288   | 64   | 248   | 270   | 282   |

### ORDERING INFORMATION

| MODEL                           | JACKET         | CCT                                                                                                                                | LED TYPE                                                             | CABLE ENTRY                                                                                                                                 | IP RATING     | CABLE LENGTH                                                                         | LENGTH                       |
|---------------------------------|----------------|------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------------------------------------------------------------------------|------------------------------|
| <b>63S16C</b><br>Neon Flex 16 C | <b>1</b> White | <u>RGB</u><br><b>RGB</b> RGB<br><u>RGBW</u><br><b>RGBW27</b> RGBW(2700K)<br><b>RGBW30</b> RGBW(3000K)<br><b>RGBW40</b> RGBW(4000K) | <b>L12</b> 12 W/m (15m max. C24)<br><b>L16</b> 16 W/m (11m max. C24) | <b>BL</b> Bottom Left<br><b>BR</b> Bottom Right<br><b>EL</b> End Left<br><b>ER</b> End Right<br><b>SL</b> Side Left<br><b>SR</b> Side Right | <b>7</b> IP67 | <b>003</b> 0.3m<br><b>010</b> 1m<br><b>030</b> 3m<br><b>050</b> 5m<br><b>100</b> 10m | <b>.XXXX</b><br>Length in mm |
| <b>63S16C</b>                   | <b>1</b>       |                                                                                                                                    |                                                                      |                                                                                                                                             | <b>7</b>      |                                                                                      |                              |

## FLEX 16 COVE

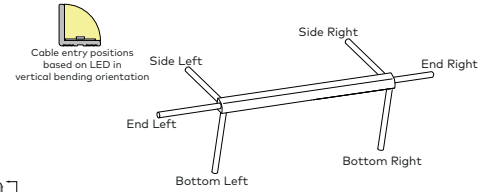

| SPECIFICATION      |                                                       |
|--------------------|-------------------------------------------------------|
| MATERIAL           | Silicone                                              |
| MOUNTING           | Surface                                               |
| IP RATING          | IP67                                                  |
| BINNING            | 3 Step                                                |
| LIFETIME (L70)     | 50,000hrs based on LM-80 & TM-21 applicable test data |
| DRIVER REQUIREMENT | 24VDC Constant voltage                                |
| PROTECTION         | UV, flame, salt and chlorine resistant                |
| STANDARDS          | EN/AS/NZS 60598-2-1, 62031, 62471                     |
| WARRANTY           | 5 Years                                               |

## PIXEL - MONO CCT

### SPECIFICATION

|                       |         |
|-----------------------|---------|
| CRI                   | >90 Ra  |
| MINIMUM BEND DIAMETER | >300 mm |
| DIMMING REQUIREMENT   | DMX     |

|          |  | LED SPECIFICATION |        |          |             | LUMEN PACKAGE lm/m |       |       |       |       |       |       |       |
|----------|--|-------------------|--------|----------|-------------|--------------------|-------|-------|-------|-------|-------|-------|-------|
|          |  | Wattage           | Pixels | DMX Addr | Max. Length | Cut Interval       | 1800K | 2400K | 2700K | 3000K | 3500K | 4000K | 6000K |
| DMX10P13 |  | 13.5 W/m          | 10 /m  | 10 /m    | 7 m         | 100 mm             | 528   | 690   | 746   | 812   | 828   | 848   | 840   |

### ORDERING INFORMATION

| MODEL                    | JACKET  | CCT       | LED TYPE                               | CABLE ENTRY     | IP RATING | CABLE LENGTH | LENGTH                |
|--------------------------|---------|-----------|----------------------------------------|-----------------|-----------|--------------|-----------------------|
| 63S16C<br>Neon Flex 16 C | 1 White | C18 1800K | DMX10P13 13.5 W/m - 10 Pix/m (7m max.) | BL Bottom Left  | 7 IP67    | 003 0.3m     | .XXXX<br>Length in mm |
|                          |         | C24 2400K |                                        | BR Bottom Right |           | 010 1m       |                       |
|                          |         | C27 2700K |                                        | EL End Left     |           | 030 3m       |                       |
|                          |         | C30 3000K |                                        | ER End Right    |           | 050 5m       |                       |
|                          |         | C35 3500K |                                        | SL Side Left    |           | 100 10m      |                       |
|                          |         | C40 4000K |                                        | SR Side Right   |           |              |                       |
|                          |         | C60 6000K |                                        |                 |           |              |                       |
| 63S16C                   | 1       |           | DMX10P13                               |                 | 7         |              |                       |

## PIXEL - TUNABLE WHITE

### SPECIFICATION



|                       |         |
|-----------------------|---------|
| CRI                   | >90 Ra  |
| MINIMUM BEND DIAMETER | >300 mm |
| DIMMING REQUIREMENT   | DMX     |

|          |  | LED SPECIFICATION |        |          |             | LUMEN PACKAGE lm/m |       |       |       |       |       |       |       |
|----------|--|-------------------|--------|----------|-------------|--------------------|-------|-------|-------|-------|-------|-------|-------|
|          |  | Wattage           | Pixels | DMX Addr | Max. Length | Cut Interval       | 1800K | 2400K | 2700K | 3000K | 3500K | 4000K | 6000K |
| DMX10P13 |  | 13.5 W/m          | 10 /m  | 20 /m    | 7 m         | 100 mm             | 246   | 344   | 376   | 396   | 400   | 404   | 424   |

### ORDERING INFORMATION

| MODEL                    | JACKET  | CCT       | CCT      | LED TYPE                               | CABLE ENTRY     | IP RATING | CABLE LENGTH | LENGTH                |
|--------------------------|---------|-----------|----------|----------------------------------------|-----------------|-----------|--------------|-----------------------|
| 63S16C<br>Neon Flex 16 C | 1 White | C18 1800K | 24 2400K | DMX10P13 13.5 W/m - 10 Pix/m (7m max.) | BL Bottom Left  | 7 IP67    | 003 0.3m     | .XXXX<br>Length in mm |
|                          |         | C24 2400K | 27 2700K |                                        | BR Bottom Right |           | 010 1m       |                       |
|                          |         | C27 2700K | 30 3000K |                                        | EL End Left     |           | 030 3m       |                       |
|                          |         | C30 3000K | 35 3500K |                                        | ER End Right    |           | 050 5m       |                       |
|                          |         | C35 3500K | 40 4000K |                                        | SL Side Left    |           | 100 10m      |                       |
|                          |         | C40 4000K | 60 6000K |                                        | SR Side Right   |           |              |                       |
|                          |         |           |          |                                        |                 |           |              |                       |
| 63S16C                   | 1       |           |          | DMX10P13                               |                 | 7         |              |                       |

## FLEX 16 COVE

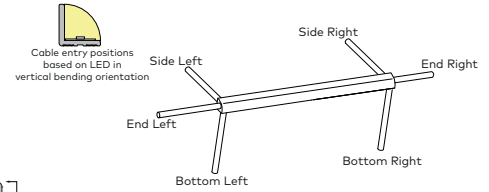

| SPECIFICATION      |                                                       |
|--------------------|-------------------------------------------------------|
| MATERIAL           | Silicone                                              |
| MOUNTING           | Surface                                               |
| IP RATING          | IP67                                                  |
| BINNING            | 3 Step                                                |
| LIFETIME (L70)     | 50,000hrs based on LM-80 & TM-21 applicable test data |
| DRIVER REQUIREMENT | 24VDC Constant voltage                                |
| PROTECTION         | UV, flame, salt and chlorine resistant                |
| STANDARDS          | EN/AS/NZS 60598-2-1, 62031, 62471                     |
| WARRANTY           | 5 Years                                               |

## PIXEL - RGB

### SPECIFICATION

MINIMUM BEND DIAMETER >300 mm

DIMMING REQUIREMENT DMX

|          | LED SPECIFICATION |           |         |             |              | LUMEN PACKAGE lm/m |       |      |
|----------|-------------------|-----------|---------|-------------|--------------|--------------------|-------|------|
|          | Pixels            | DMX Addr. | Wattage | Max. Length | Cut Interval | RED                | GREEN | BLUE |
| DMX02P14 | 2 /m              | 6 /m      | 14 W/m  | 7 m         | 500 mm       | 74                 | 200   | 46   |
| DMX10P14 | 10 /m             | 30 /m     | 14 W/m  | 7 m         | 100 mm       | 74                 | 200   | 46   |

### ORDERING INFORMATION

| MODEL                           | JACKET         | CCT            | LED TYPE                                                                                  | CABLE ENTRY            | IP RATING     | CABLE LENGTH    | LENGTH                       |
|---------------------------------|----------------|----------------|-------------------------------------------------------------------------------------------|------------------------|---------------|-----------------|------------------------------|
| <b>63S16C</b><br>Neon Flex 16 C | <b>1</b> White | <b>RGB</b> RGB | <b>DMX02P14</b> 14 W/m - 2 Pix/m (7m max.)<br><b>DMX10P14</b> 14 W/m - 10 Pix/m (7m max.) | <b>BL</b> Bottom Left  | <b>7</b> IP67 | <b>003</b> 0.3m | <b>.XXXX</b><br>Length in mm |
|                                 |                |                |                                                                                           | <b>BR</b> Bottom Right |               | <b>010</b> 1m   |                              |
|                                 |                |                |                                                                                           | <b>EL</b> End Left     |               | <b>030</b> 3m   |                              |
|                                 |                |                |                                                                                           | <b>ER</b> End Right    |               | <b>050</b> 5m   |                              |
|                                 |                |                |                                                                                           | <b>SL</b> Side Left    |               | <b>100</b> 10m  |                              |
|                                 |                |                |                                                                                           | <b>SR</b> Side Right   |               |                 |                              |
| <b>63S16C</b>                   | <b>1</b>       |                |                                                                                           |                        | <b>7</b>      |                 |                              |

## PIXEL - RGBW

### SPECIFICATION

MINIMUM BEND DIAMETER >300 mm

DIMMING REQUIREMENT DMX

|      |          | LED SPECIFICATION |           |         |             |              | LUMEN PACKAGE lm/m |       |      |       |       |       |
|------|----------|-------------------|-----------|---------|-------------|--------------|--------------------|-------|------|-------|-------|-------|
|      |          | Pixels            | DMX Addr. | Wattage | Max. Length | Cut Interval | RED                | GREEN | BLUE | 2700K | 3000K | 4000K |
| RGBW | DMX10P16 | 10 /m             | 40 /m     | 16 W/m  | 7 m         | 100 mm       | 54                 | 143   | 33   |       | 135   |       |

### ORDERING INFORMATION

| MODEL                           | JACKET         | CCT                                                                                 | LED TYPE                                    | CABLE ENTRY            | IP RATING     | CABLE LENGTH    | LENGTH                       |
|---------------------------------|----------------|-------------------------------------------------------------------------------------|---------------------------------------------|------------------------|---------------|-----------------|------------------------------|
| <b>63S16C</b><br>Neon Flex 16 C | <b>1</b> White | <b>RGBW27</b> RGBW(2700K)<br><b>RGBW30</b> RGBW(3000K)<br><b>RGBW40</b> RGBW(4000K) | <b>DMX10P16</b> 16 W/m - 10 Pix/m (7m max.) | <b>BL</b> Bottom Left  | <b>7</b> IP67 | <b>003</b> 0.3m | <b>.XXXX</b><br>Length in mm |
|                                 |                |                                                                                     |                                             | <b>BR</b> Bottom Right |               | <b>010</b> 1m   |                              |
|                                 |                |                                                                                     |                                             | <b>EL</b> End Left     |               | <b>030</b> 3m   |                              |
|                                 |                |                                                                                     |                                             | <b>ER</b> End Right    |               | <b>050</b> 5m   |                              |
|                                 |                |                                                                                     |                                             | <b>SL</b> Side Left    |               | <b>100</b> 10m  |                              |
|                                 |                |                                                                                     |                                             | <b>SR</b> Side Right   |               |                 |                              |
| <b>63S16C</b>                   | <b>1</b>       |                                                                                     | <b>DMX10P16</b>                             |                        | <b>7</b>      |                 |                              |