
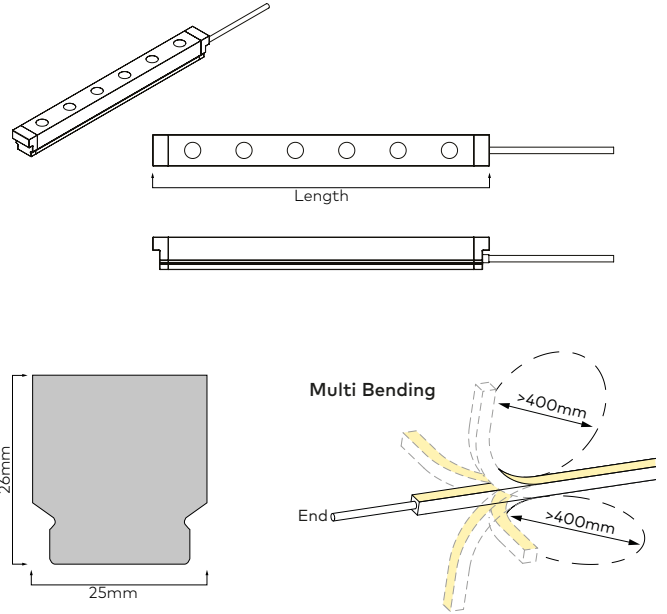


FLEX WALL WASHER

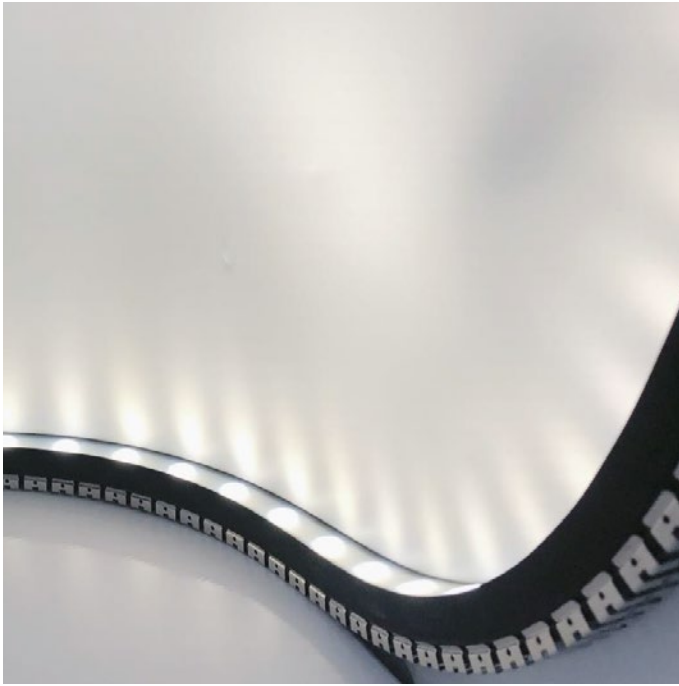

LUMINAIRE SPECIFICATION

Dimensions	Flex : 25x26mm 25x29mm with fixings
Maximum length	5m Length = n cut intervals + 35mm
Cut interval	250mm
LED pitch	41.5mm
Minimum bend diameter	>400mm (Bendable in both planes)
Material	Silicone
Mounting	Surface
IP Rating	IP67
Optional accessories	Aluminium profile Stainless steel flexible profile

LED SPECIFICATION

LED Wattage	24W/m
LED Qty	24/m
CCT	2700K, 3000K, 4000K, 6000K
CRI	>90Ra
Optics	25°, 40°, 30x55°
Lumen package	2700K : 1260 lm/m 3000K : 1350 lm/m 4000K : 1440 lm/m 6000K : 1485 lm/m
Binning	3 Step
Driver requirement	Constant voltage
Voltage	24VDC

ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH	
63S2526L25	25°	1 White	C CRI >90	27 2700K	S24 24W/m	E End	7 IP67	003 0.3m	.XXXX Length in mm
63S2526L40	40°							2 Black	
63S2526L3055	30x55°							030 3m	
								050 5m	
								100 10m	
		C		S24	E	7			