
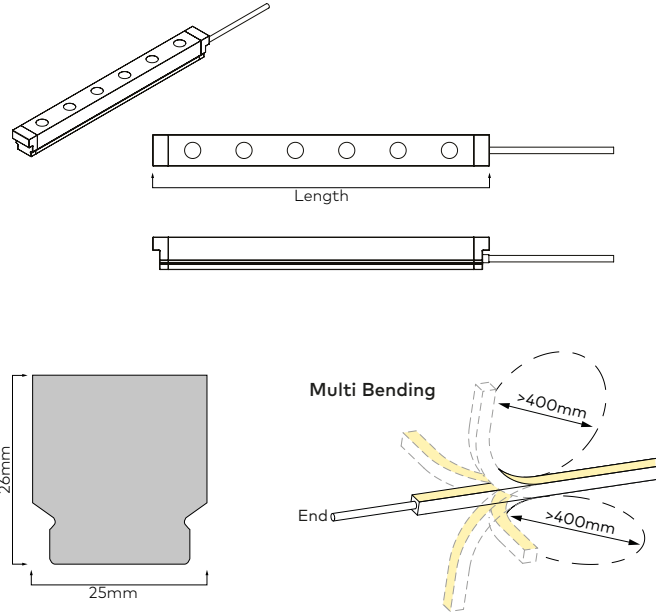


FLEX WALL WASHER - PIXEL DMX

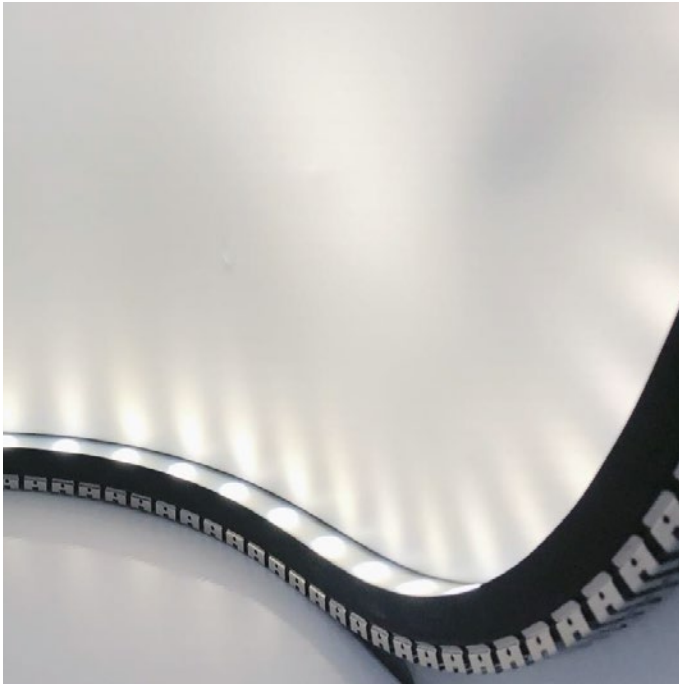

LUMINAIRE SPECIFICATION

Dimensions	Flex : 25x26mm 25x29mm with fixings
Maximum length	5m Length = n cut intervals + 35mm
Cut interval	250mm
LED pitch	41.5mm
Minimum bend diameter	>400mm (Bendable in both planes)
Material	Silicone
Mounting	Surface
IP Rating	IP67
Optional accessories	Aluminium profile Stainless steel flexible profile

LED SPECIFICATION

LED Wattage	24W/m
LED Qty	24/m
Pixels	4/m DMX (4 addresses/m)
CCT	2700K, 3000K, 4000K, 6000K
CRI	>90Ra
Optics	25°, 40°, 30x55°
Lumen package	1440 lm/m at full power (4000K)
Binning	3 Step
Driver requirement	Constant voltage
Voltage	24VDC

ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S2526L25	25°	1 White 2 Black	C CRI >90	DMX04P24 24W/m 4P/m	E End	7 IP67	003 0.3m	.XXXX
63S2526L40	40°						010 1m	Length in mm
63S2526L3055	30x55°	030 3m						
		050 5m						
			60 6000K			100 10m		
		C		DMX04P24	E	7		