
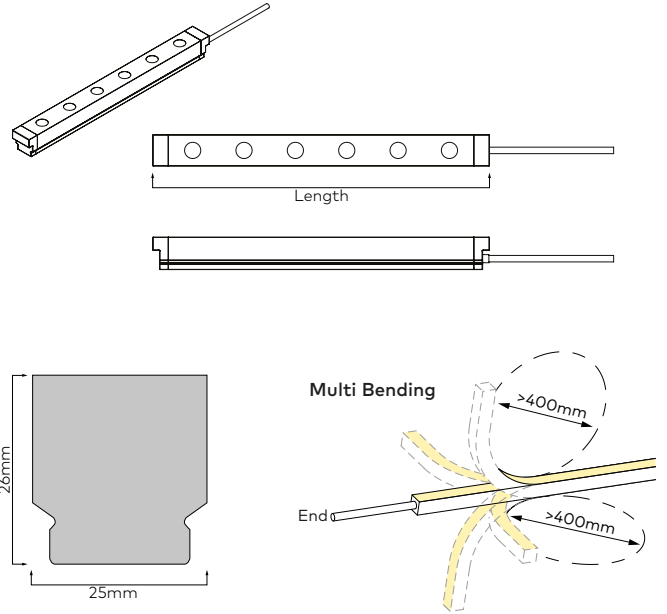


FLEX WALL WASHER - PIXEL DMX RGB

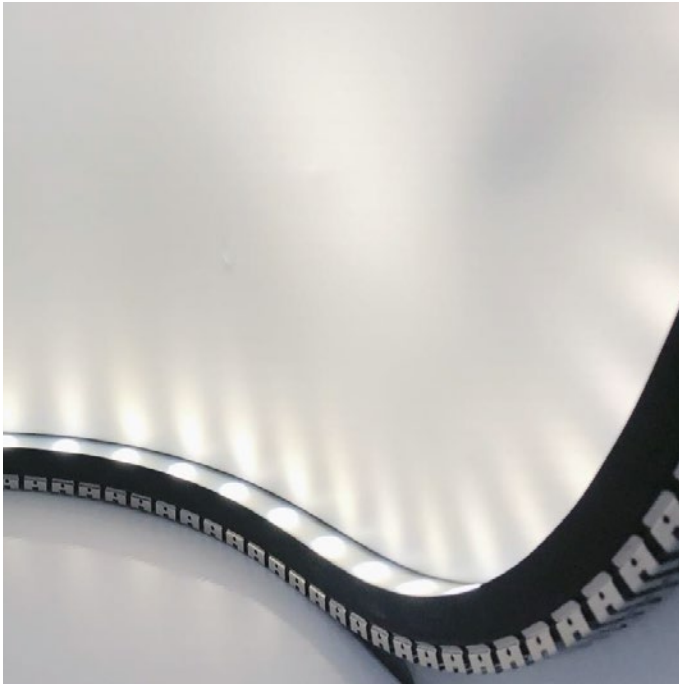

LUMINAIRE SPECIFICATION

Dimensions	Flex : 25x26mm 25x29mm with fixings
Maximum length	5m Length = n cut intervals + 35mm
Cut interval	250mm
LED pitch	41.5mm
Minimum bend diameter	>400mm (Bendable in both planes)
Material	Silicone
Mounting	Surface
IP Rating	IP67
Optional accessories	Aluminium profile Stainless steel flexible profile

LED SPECIFICATION

LED Wattage	24W/m
LED Qty	24/m
Pixels	4/m DMX (12 addresses/m)
CCT	RGB
Optics	25°, 40°, 30x55°
Lumen package	Red : 160 lm/m Green : 480 lm/m Blue : 150 lm/m
Driver requirement	Constant voltage
Voltage	24VDC

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH	
63S2526L25	25°	1 White	RGB RGB	DMX04P24 24W/m 4P/m	E End	7 IP67	003 0.3m	.XXXX Length in mm
63S2526L40	40°						010 1m	
63S2526L3055	30x55°	2 Black					030 3m	
							050 5m	
							100 10m	
		RGB	DMX04P24	E	7			