
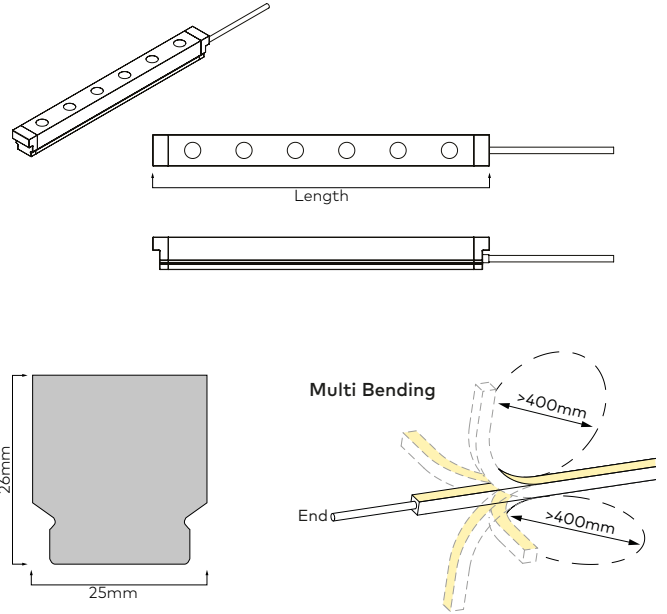


FLEX WALL WASHER - PIXEL DMX RGBW

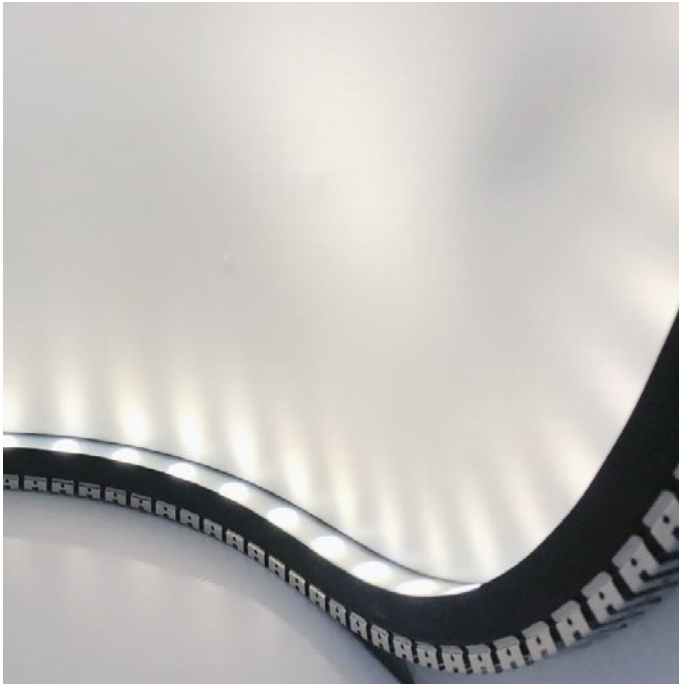

LUMINAIRE SPECIFICATION

Dimensions	Flex : 25x26mm 25x29mm with fixings
Maximum length	5m Length = n cut intervals + 35mm
Cut interval	250mm
LED pitch	41.5mm
Minimum bend diameter	>400mm (Bendable in both planes)
Material	Silicone
Mounting	Surface
IP Rating	IP67
Optional accessories	Aluminium profile Stainless steel flexible profile

LED SPECIFICATION

LED Wattage	24W/m
LED Qty	24/m
Pixels	4/m DMX (16 addresses/m)
CCT	RGBW 2700K, 3000K, 4000K, 6000K options
Optics	25°, 40°, 30x55°
Lumen package	Red : 160 lm/m Green : 480 lm/m Blue : 150 lm/m White : 350lm/m (3000K)
Driver requirement	Constant voltage
Voltage	24VDC

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH	
63S2526L25	25°	1 White	RGBW27 RGBW-2700K	DMX04P24 24W/m 4P/m	E End	7 IP67	003 0.3m	.XXXX
63S2526L40	40°	2 Black	RGBW30 RGBW-3000K				010 1m	Length in mm
63S2526L3055	30x55°		RGBW40 RGBW-4000K				030 3m	
			RGBW60 RGBW-6000K				050 5m	
						100 10m		
			DMX04P24	E	7			