
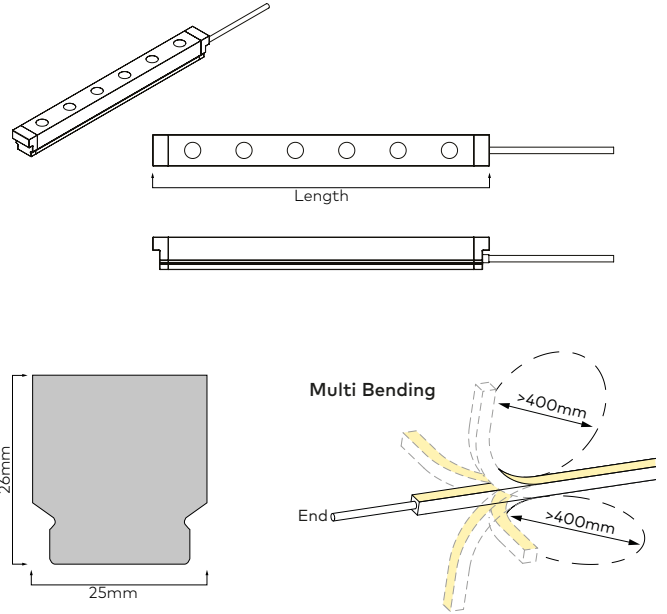


FLEX WALL WASHER - RGBW

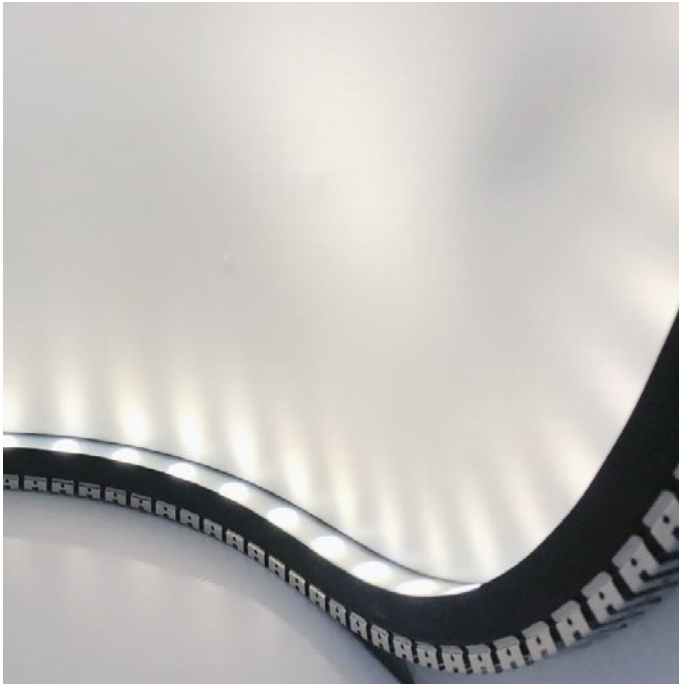

LUMINAIRE SPECIFICATION

| | |
|------------------------------|---|
| Dimensions | Flex : 25x26mm 25x29mm with fixings |
| Maximum length | 5m Length = n cut intervals + 35mm |
| Cut interval | 250mm |
| LED pitch | 41.5mm |
| Minimum bend diameter | >400mm (Bendable in both planes) |
| Material | Silicone |
| Mounting | Surface |
| IP Rating | IP67 |
| Optional accessories | Aluminium profile Stainless steel flexible profile |

LED SPECIFICATION

| | |
|---------------------------|---|
| LED Wattage | 24W/m |
| LED Qty | 24/m |
| CCT | RGBW 2700K, 3000K, 4000K, 6000K options |
| Optics | 25°, 40°, 30x55° |
| Lumen package | Red : 160 lm/m Green : 480 lm/m Blue : 150 lm/m White (3000K) : 350 lm/m |
| Binning | 3 Step |
| Driver requirement | Constant voltage |
| Voltage | 24VDC |

ORDERING INFORMATION

| MODEL | JACKET | CCT | LED TYPE | CABLE ENTRY | CONNECTOR IP | CABLE LENGTH | LENGTH |
|--------------|--------|---------|-------------------|-------------|--------------|--------------|-----------------------|
| 63S2526L25 | 25° | 1 White | RGBW27 RGBW-2700K | S24 24W/m | E End | 7 IP67 | .XXXX Length in mm |
| 63S2526L40 | 40° | 2 Black | RGBW30 RGBW-3000K | | | | |
| | | | RGBW40 RGBW-4000K | | | | |
| 63S2526L3055 | 30x55° | | RGBW60 RGBW-6000K | | | | |
| | | | S24 | E | 7 | | |