
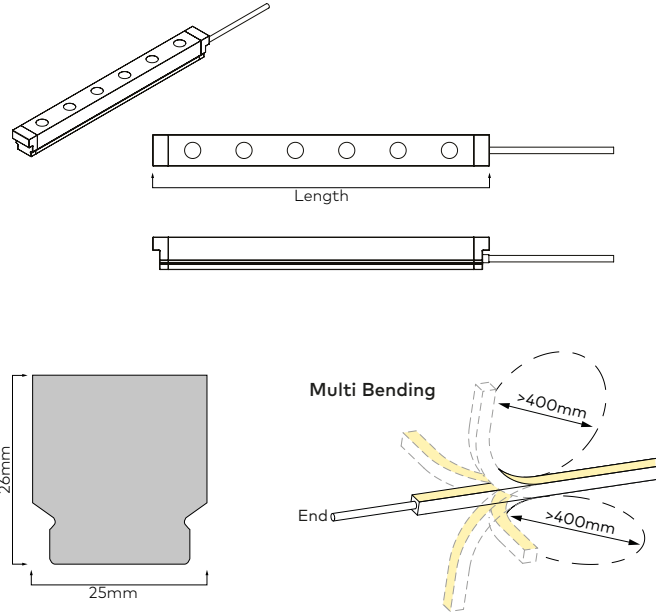


## FLEX WALL WASHER - TUNABLE WHITE

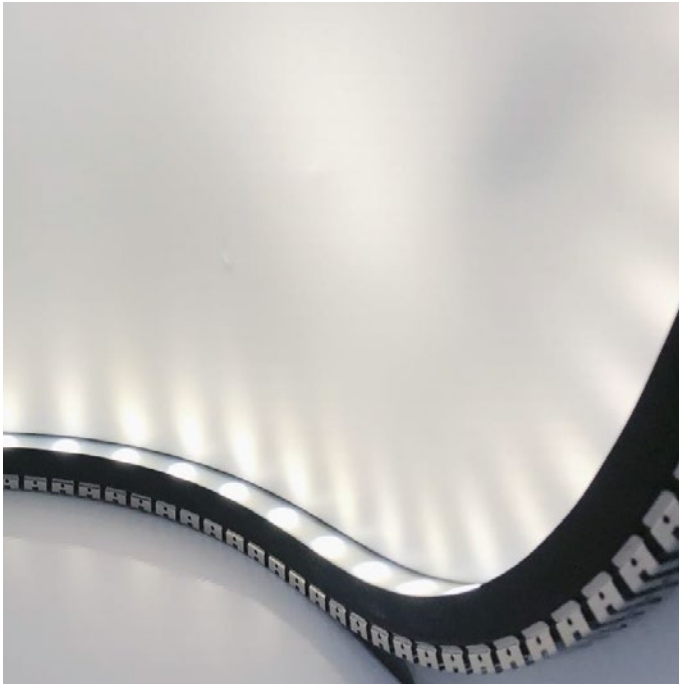

### LUMINAIRE SPECIFICATION

<b>Dimensions</b>	Flex : 25x26mm 25x29mm with fixings
<b>Maximum length</b>	5m Length = $n$ cut intervals + 35mm
<b>Cut interval</b>	250mm
<b>LED pitch</b>	41.5mm
<b>Minimum bend diameter</b>	>400mm (Bendable in both planes)
<b>Material</b>	Silicone
<b>Mounting</b>	Surface
<b>IP Rating</b>	IP67
<b>Optional accessories</b>	Aluminium profile Stainless steel flexible profile

### LED SPECIFICATION

<b>LED Wattage</b>	2x12W/m
<b>LED Qty</b>	24/m
<b>CCT</b>	See options table below
<b>CRI</b>	>90Ra
<b>Optics</b>	25°, 40°, 30x55°
<b>Typical Lumen package</b>	2700K : 630 lm/m 6000K : 740 lm/m
<b>Binning</b>	3 Step
<b>Driver requirement</b>	Constant voltage
<b>Voltage</b>	24VDC

### ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH		
63S2526L25	25°	1 White	C CRI >90	18 1800K	24 2400K	CT12 2x12W/m	E End	7 IP67	003 0.3m	.XXXX Length in mm	
63S2526L40	40°			2 2 Black					24 2400K		27 2700K
63S2526L3055	30x55°			27 2700K	30 3000K				030 3m		
				30 3000K					35 3500K		050 5m
				35 3500K					40 4000K		100 10m
				40 4000K					60 6000K		
					CT12	E	7				