


# 295x1195mm Panel

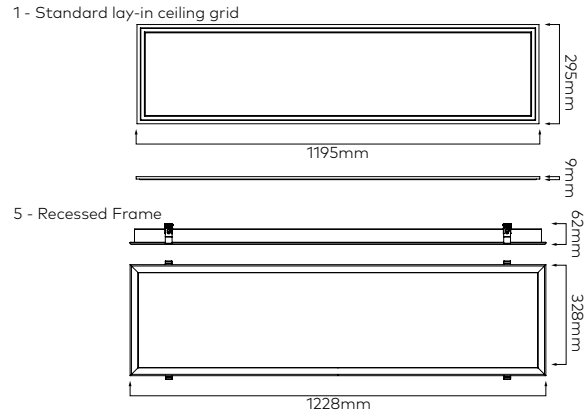

## Features

- Recessed, mounted or suspended
- Ultra thin
- Low glare
- Full intensity from switch on
- Long life L70 40,000 hrs based on LM-80 & TM-21 applicable test data
- Remote constant current driver
- Mains phase, 0-10V and DALI dimming options available
- 5 Year warranty

## Specification

<b>Dimensions (Lay-in)</b>	295x1195mm
<b>Dimensions (Recessed)</b>	328x1128x62mm Cut-out : 305x1205mm
<b>Luminaire material</b>	Aluminium
<b>IP Rating</b>	IP44 standard IP65 Option
<b>Output</b>	36W : 3300lm 48W : 4500lm
<b>CCT</b>	2700°K 3000°K 4000°K 6-6500°K
<b>CRI</b>	>80Ra
<b>Drive current</b>	36W : 900mA 48W : 1.2A

## Ordering Information example 6920.12132

Model	Finish	LED CCT	Driver	Power	Mounting	IP Rating
6920. 295x1195mm	1 White	2 2700°K	1 Non-dimming	3 36W	1 Standard lay-in ceiling grid	IP44
		3 3000°K	2 Phase dimming	4 48W	2 Surface mount frame	6 IP65
		4 4000°K	3 0-10V Dimming		3 Suspended	
		6 6-6500°K	4 DALI Dimming		5 Recessed frame	

(i) Typical lumen output subject to selected CCT