




595x1195mm Panel

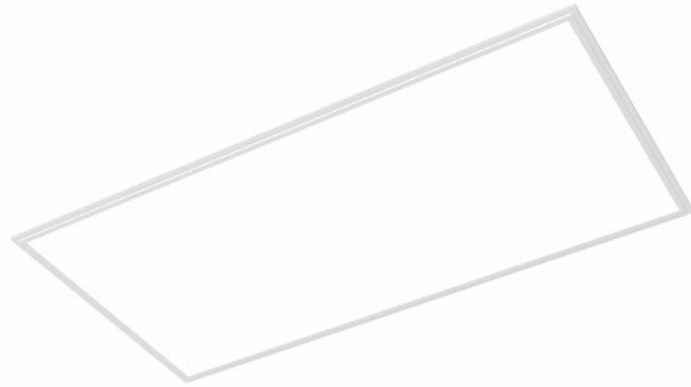

1 - Standard lay-in ceiling grid

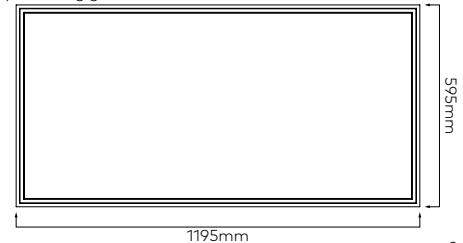

5 - Recessed Frame

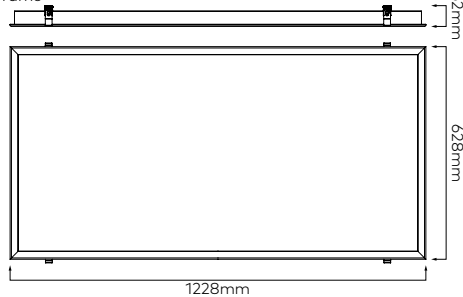

Features

- Recessed, mounted or suspended
- Ultra thin
- Low glare
- Full intensity from switch on
- Long life L70 40,000 hrs based on LM-80 & TM-21 applicable test data
- Remote constant current driver
- Mains phase, 0-10V and DALI dimming options available
- 5 Year warranty

Specification

Dimensions (Lay-in)	595x1195x9mm
Dimensions (Recessed)	628x1228x62mm Cut-out : 605x1205mm
Luminaire material	Aluminium
IP Rating	IP44 standard IP65 Option
Output	48W : 4500lm 72W : 6900lm
CCT	2700°K 3000°K 4000°K 6-6500°K
CRI	>80Ra
Drive current	48W : 1.2A 72W : 1.8A

Ordering Information example 6923.12142

Model	Finish	LED CCT	Driver	Power	Mounting	IP Rating
6923. 595x1195mm	1 White	2 2700°K	1 Non-dimming	4 48W	1 Standard lay-in ceiling grid	IP44
		3 3000°K	2 Phase dimming	7 72W	2 Surface mount frame	6 IP65
		4 4000°K	3 0-10V Dimming		3 Suspended	
		6 6-6500°K	4 DALI Dimming		5 Recessed frame	