

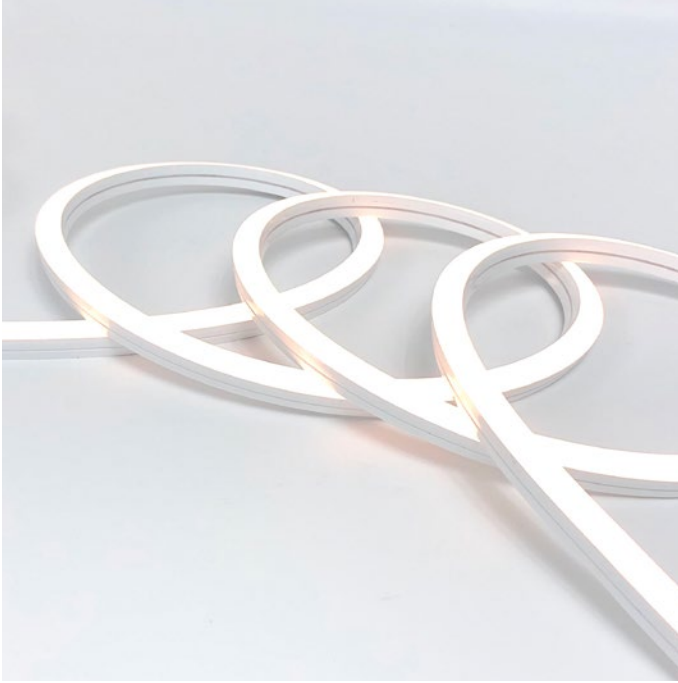


FLEX 10² HORIZONTAL WARM DIM

Horizontal Bending

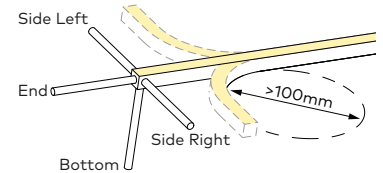

LUMINAIRE SPECIFICATION

Width	10mm
Height	10mm
Maximum length	5m
Cut interval	50mm
Minimum bend diameter	>100mm
Material	White silicone
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	10W/m
CCT	See options table below
CRI	>90Ra
Lumen package	445 lm/m @3000K
Binning	3 Step
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
Driver requirement	Constant voltage - Voltage reduction/amplitude dimming driver required (not PWM compatible)
Voltage	24VDC

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S1010H Neon Flex 10 Horizontal	1 White	C2718W 2700K - 1800K C3018W 3000K - 1800K	10R 10W/m	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S1010H	1		10R		7		