


Warm Dim

LED Tape

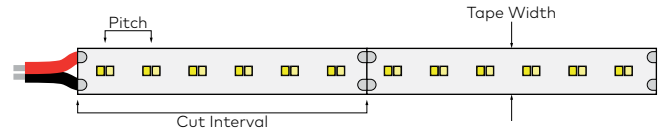

LED Specification

Length	5m Reel <small>(custom lengths to order - see table below for maximum run length)</small>
LED Voltage	24V
CCT	2700°K - 1800°K 3000°K - 1800°K
CRI	> 90Ra
Connector	2 Wire tails as standard
Driver requirements	Single channel DC voltage dimming. Not compatible with PWM dimming modules/drivers.

LED Type 2216 - 192 LEDs/m

Maximum run length (single feed)	5m		
Cut interval / Pitch	62.5mm / 10.4mm	Tape Width	10mm
LED qty/m	192 (96 of each CCT)	IP Rating	IP20, IP65 and IP68 options
Power / Output (@3000K)	9.6W /m - 772lm, 14.4W /m - 1012lm		

Ordering Information example 6412.C2718WR6610

MODEL	LED CCT	DRIVER COMPATIBILITY	LED TYPE
6412. IP20	C2718WR 2700°K - 1800°K	WR Voltage reducing	6610 9.6W/m
6416. IP65	C3018WR 3000°K - 1800°K		6614 14.4W/m
6418. IP68			

LED Type 2216 - 312 LEDs/m

Maximum run length (single feed)	4.8W/m : 5m, 9.6W/m & 14.4W/m : 3m		
Cut interval / Pitch	38.46mm / 6.4mm	Tape Width	5mm
LED qty/m	312 (156 of each CCT)	IP Rating	IP20 and IP65 options
Power / Output (@3000K)	4.8W/m : 423lm/m, 9.6W/m - 837lm/m, 14.4W /m - 1049lm		

Ordering Information example 6412.C2718WR6910

MODEL	LED CCT	DRIVER COMPATIBILITY	LED TYPE
6412. IP20	C2718WR 2700°K - 1800°K	WR Voltage reducing	6905 4.8W/m
6416. IP65	C3018WR 3000°K - 1800°K		6910 9.6W/m
			6914 14.4W/m

LED Type 3014 - 240 LEDs/m

Maximum run length (single feed)	5m		
Cut interval / Pitch	50mm / 8.3mm	Tape Width	10mm
LED qty/m	240 (120 of each CCT)	IP Rating	IP20 and IP65 options
Power / Output (@3000K)	20W/m - 1600lm, 24W /m - 1800lm		

Ordering Information example 6412.C2718WR4820

MODEL	LED CCT	DRIVER COMPATIBILITY	LED TYPE
6412. IP20	C2718WR 2700°K - 1800°K	WR Voltage reducing	4820 20W/m
6416. IP65	C3018WR 3000°K - 1800°K		4824 24W/m