




Description:

Garden spike mounted version of the Wallaroo Bullnose Wall Light fitted with COLORS D6240 LED, Various colour temperatures available, finished in Brass (Aged), pre-fitted Borosilicate Glass Lens, 500mm lead, remote driver. IP65 rated.

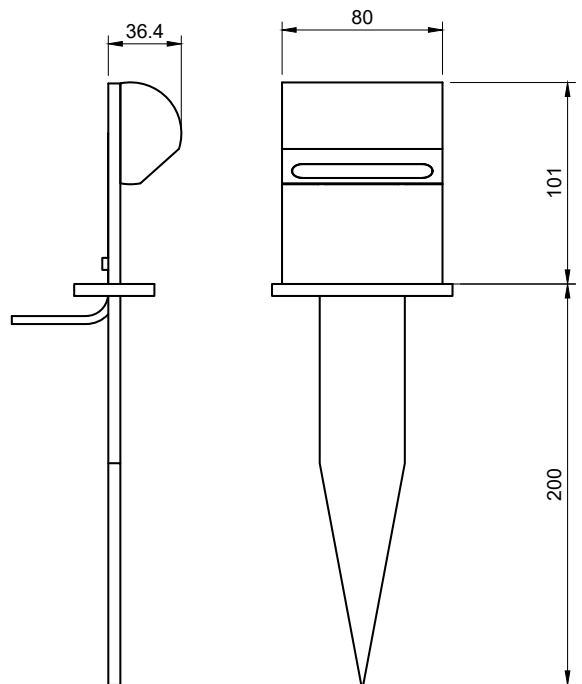

Technical:

LED TYPE	COLORS D6240	CONTROL GEAR	REMOTE
RATED POWER	1W	DIMMING PROTOCOL	DALI - 0-10V - PHASE DIM - ON/OFF
CRI	80	CABLE LENGTH	500MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	GARDEN SPIKE
INPUT POWER	24V DC	WEIGHT	ON REQUEST
NOMINAL LUMENS	120lm	HARDWARE	GLASS LENS, GLAND, CABLE
IP RATING	IP65	CONSTRUCTION	MACHINED METAL & HEATSINK
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

Product Generator: example NL1516CV-AB-D-30-F-1W-DALI-N/A

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL1516CV	AB Aged Brass	D Diffused	27 2700K	F Floor	1W / 24V DC	DALI	N/A
	BR Brushed Brass		30 3000K			0-10V	
	PB Black		40 4000K			Phase	
	PW White					On/Off	
	CC Custom						

NL1516	-		-		-		-		-
--------	---	--	---	--	---	--	---	--	---