


Description:

Low Profile Surface mounted Direct Wall Light, Various colour temperatures, IP54, finished in machined solid Brass (Aged) or 6061 Aluminium (Powder Coated), UV stabilized frosted Acrylic diffuser, pre-fitted 500mm lead, remote 24VDC constant voltage, 'Covert Mounting System'

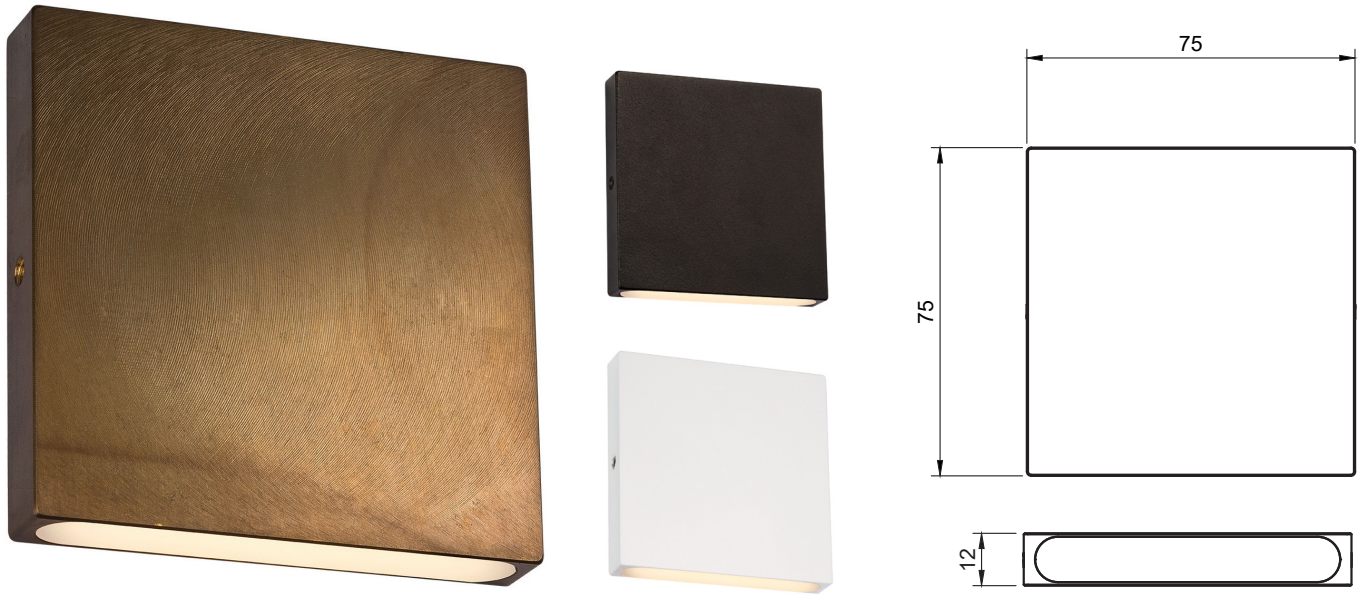

Technical:

| | | | |
|--------------------|--------------------------|------------------|-----------------------------------|
| LED TYPE | COLORS D6240 | CONTROL GEAR | REMOTE |
| RATED POWER | 1W | DIMMING PROTOCOL | DALI - 0-10V - PHASE DIM - ON/OFF |
| CRI | 80 | CABLE LENGTH | 500MM STANDARD LENGTH |
| BEAM ANGLES | NOMINATED IN TABLE BELOW | MOUNTING OPTIONS | SURFACE |
| INPUT POWER | 24V DC | WEIGHT | 0.2KG |
| NOMINAL LUMENS | 500lm | HARDWARE | GLASS LENS, O-RING, GLAND, CABLE |
| IP RATING | IP54 | CONSTRUCTION | MACHINED METAL & HEATSINK |
| COLOUR TEMPERATURE | 2700K - 3000K - 4000K | WARRANTY | 2 YEARS |

Product Generator: example 1525-AB-D-30-W-5W-DALI-N/A

| Model | Finish | Beam Angle | CCT | Mounting | Wattage | Dimming | Accessory |
|--------|------------------|------------|----------|----------------|-------------|---------|-----------|
| NL1525 | AB Aged Brass | D Diffused | 27 2700K | W Wall Mounted | 1W / 24V DC | DALI | N/A |
| | BR Brushed Brass | | 30 3000K | | | 0-10V | |
| | PD Black | | 40 4000K | | | Phase | |
| | PW White | | | | | On/Off | |
| | CC Custom | | | | | | |

| | | | | | | | | |
|--------|---|--|---|--|---|--|---|--|
| NL1525 | - | | - | | - | | - | |
|--------|---|--|---|--|---|--|---|--|