


Description:

Shallow surface mount profile, path/indicator light, available in various colour temperatures, IP44, finished in machined solid aged brass, fitted with UV stablized frosted diffuser, pre-fitted 500mm lead, remote 24VDC constant voltage and 'Covert Mounting System'.

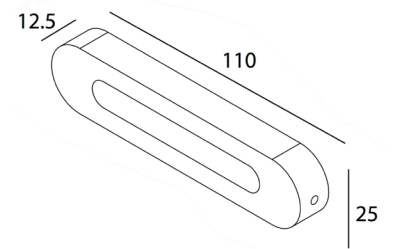

Technical:

LED TYPE	COLORS D6240	CONTROL GEAR	REMOTE
RATED POWER	1W	DIMMING PROTOCOL	DALI - 0-10V - PHASE DIM - ON/OFF
CRI	80	CABLE LENGTH	500MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	SURFACE MOUNT
INPUT POWER	24V DC	WEIGHT	0.4KG
NOMINAL LUMENS	120lm	HARDWARE	FROSTED LENS, GLAND, CABLE
IP RATING	IP44	CONSTRUCTION	MACHINED METAL & HEATSINK
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

Product Generator: example 1620-AB-D-30-SM-1W-DALI-N/A

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL1620	AB Aged Brass	D Diffused	27 2700K	SM Surface Mount	1W / 24V	DALI	N/A
			30 3000K			0-10V	
			40 4000K			Phase	
						On/Off	

NL1620	-	-	-	-	-	-	-
--------	---	---	---	---	---	---	---