


Description:

Wall mounted, Up / Down Wall Light, 1Watt XP-G3 LED, various colour temperatures, IP65, Machined Solid Brass Aged, Reflector brass folded (Aged), Machined 6061 Aluminium Powder Coated, Pre-fitted exterior rated 500mm lead, surface 'Covert Mounting System'

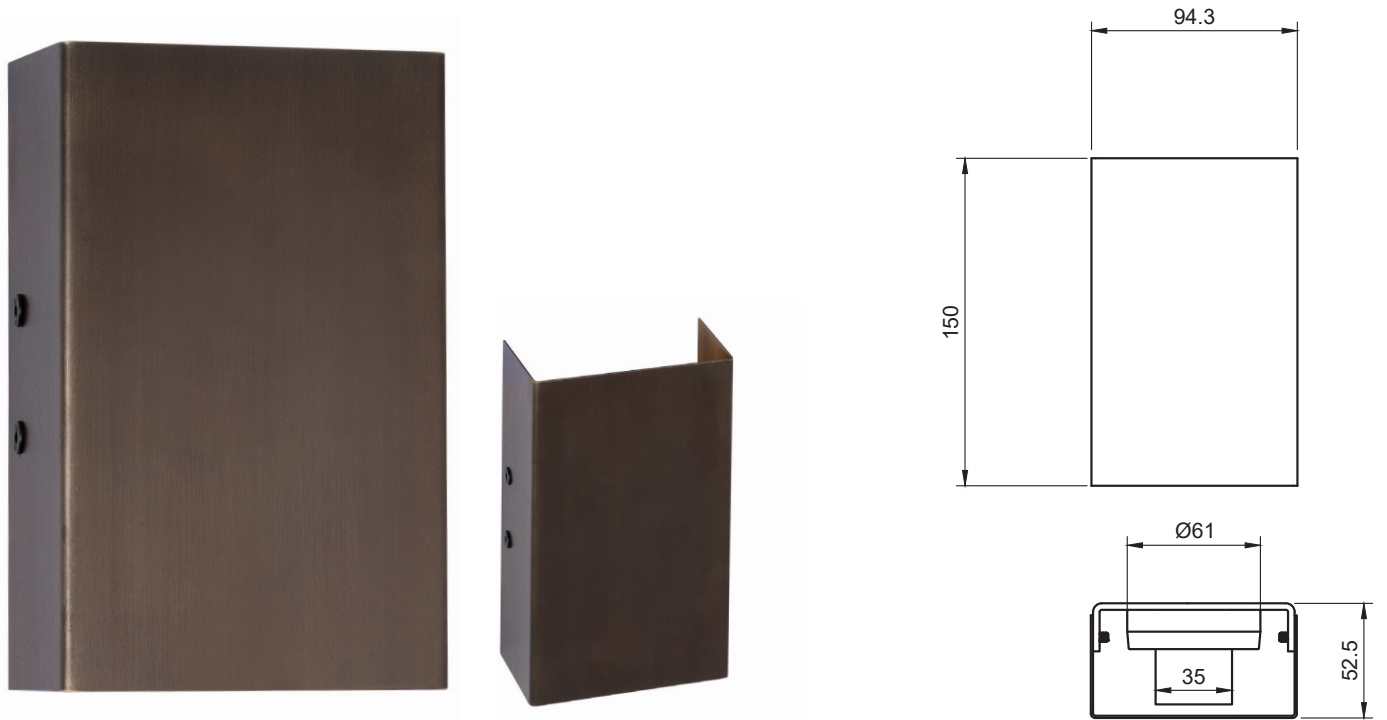

Technical:

LED TYPE	CREE XLAMP XP-G3	CONTROL GEAR	REMOTE
RATED POWER	1W - 3W	DIMMING PROTOCOL	DALI - 0-10V - PHASE DIM - ON/OFF
CRI	80	CABLE LENGTH	500MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	SURFACE WALL
INPUT POWER / FORWARD VOLTAGE	350mA - 700mA / 6V	WEIGHT	0.5KG
NOMINAL LUMENS	190lm - 380mA	HARDWARE	GLAND, CABLE
IP RATING	IP65	CONSTRUCTION	MACHINED METAL & HEATSINK
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

Product Generator: example 2237-AB-M-30-W-1W-4-1

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL2237	AB Aged Brass	N Narrow 10°	27 2700K	W Wall Mounted	1W / 350mA	1 DALI	1 Honeycomb Louver
	BR Brushed Brass	M Medium 21°	30 3000K		3W / 700mA	2 0-10V	2 Diffuser Lens
	CC Custom	W Wide 33°	40 4000K			3 Phase	
						4 On/Off	

NL2237	-	-	-	-	-	-	-
--------	---	---	---	---	---	---	---