


**Description:**

Wall mounted with custom lettering, Up / Down Wall Light, 14Watt COLORS D6240, various colour temperatures, IP44, Machined Solid Brass Aged, Reflector brass folded (Aged), Machined 6061 Aluminium Powder Coated, Pre-fitted exterior rated 500mm lead, surface 'Covert Mounting System'

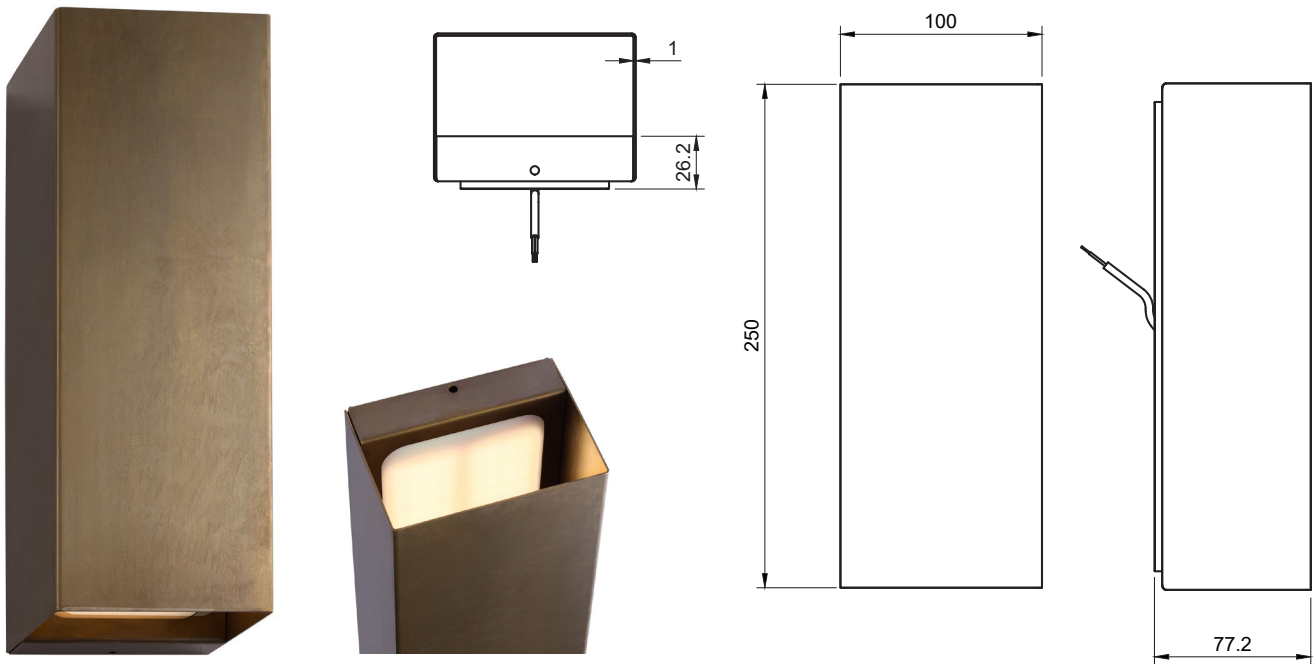

**Technical:**

LED TYPE	COLORS D6240	CONTROL GEAR	REMOTE
RATED POWER	14W	DIMMING PROTOCOL	DALI - 0-10V - PHASE DIM - ON/OFF
CRI	80	CABLE LENGTH	500MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	SURFACE WALL
INPUT POWER	24V	WEIGHT	0.5KG
NOMINAL LUMENS	800lm	HARDWARE	GLAND, CABLE
IP RATING	IP44	CONSTRUCTION	MACHINED METAL & HEATSINK
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

**Product Generator:** example 2238-AB-D-30-W-14W-DALI-N/A

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL2238	AB Aged Brass	D Diffused	27 2700K	W Wall Mounted	14 W / 24V	DALI	N/A
	BR Brushed Brass		30 3000K			0-10V	
	CC Custom		40 4000K			Phase	
						On/Off	

NL2238	-		-		-		-	
--------	---	--	---	--	---	--	---	--