


Description:

Surface mounted Indirect Wall Light, available in various colour temperatures, IP20, finished in Machined 6061 Aluminium with various finishes, UV stabilized Frosted Acrylic Diffuser, pre-fitted 500mm lead, remote 500mA Constant Current, 'Covert Mounting System'.

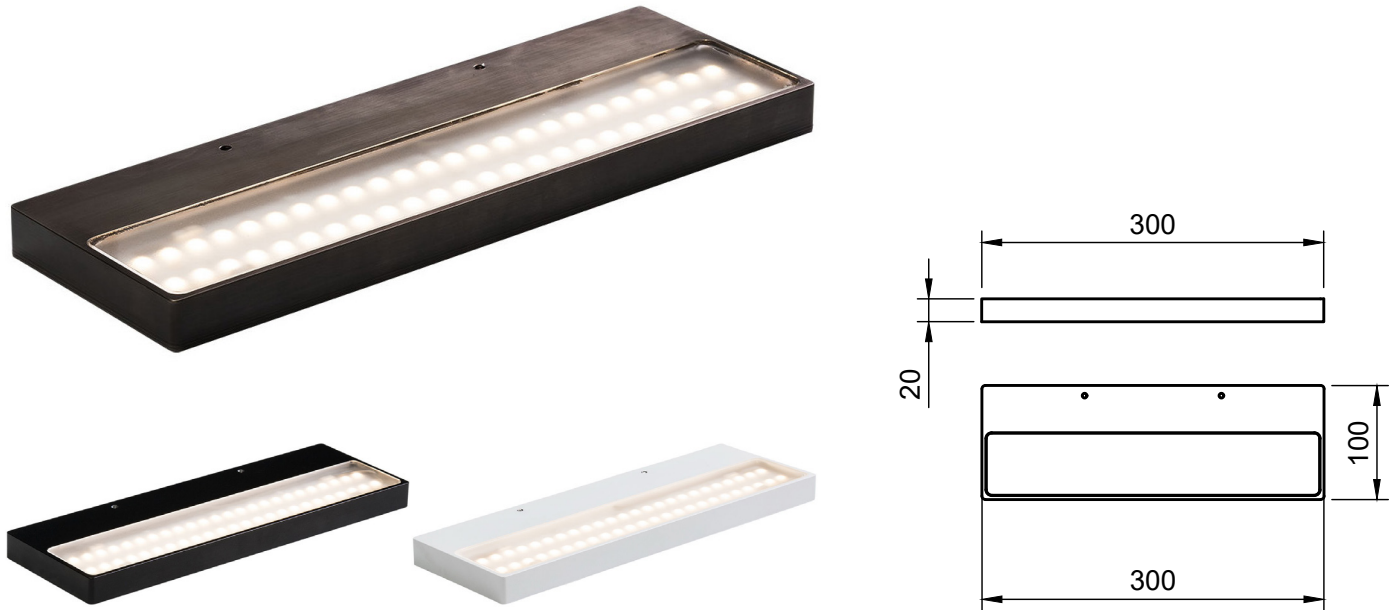

Technical:

LED TYPE	Vossloh LED Line SMD Gen. 3	CONTROL GEAR	REMOTE
RATED POWER	40W	DIMMING PROTOCOL	DALI - 0-10V - PHASE DIM - ON/OFF
CRI	80	CABLE LENGTH	500MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	SURFACE
INPUT POWER / FORWARD VOLTAGE	500mA / 18V	WEIGHT	0.8KG
NOMINAL LUMENS	4000lm	HARDWARE	GLASS LENS, O-RING, GLAND, CABLE
IP RATING	IP20	CONSTRUCTION	MACHINED METAL & HEATSINK
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

Product Generator: example 4005-AB-M-30-SM-9W-DALI

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL4005	AB Aged Brass	D Diffused	27 2700K	SM Surface Mount	18W / 350mA	DALI	N/A
	BR Brushed Brass		30 3000K			0-10V	
	PB Black		40 4000K			Phase	
	PW White					On/Off	
	CC Custom						

NL4005	-		-		-		-	
--------	---	--	---	--	---	--	---	--