


## FLEX 10X10 MULTI BEND HIGH OUTPUT

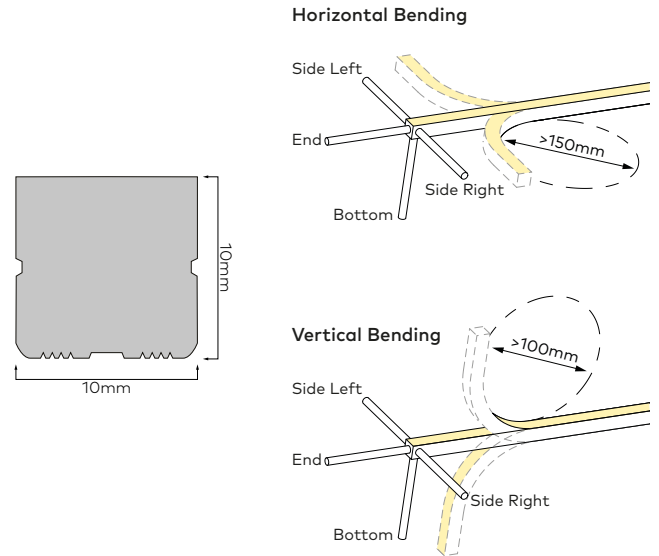

### LUMINAIRE SPECIFICATION

<b>Width</b>	10 mm
<b>Height</b>	10 mm
<b>Maximum length</b>	4 m
<b>Cut interval</b>	55.6 mm
<b>Minimum bend diameter</b>	Horizontal : >150 mm Vertical : > 100 mm
<b>Material</b>	White silicone
<b>Mounting</b>	Surface
<b>IP Rating</b>	IP67
<b>Protection</b>	UV, flame, salt and chlorine resistant
<b>Standards</b>	EN/AS/NZS 60598-2-1, 62031, 62471
<b>Warranty</b>	5 Years

### LED SPECIFICATION

<b>LED Wattage</b>	10 W/m										
<b>CCT</b>	See options table below										
<b>CRI</b>	>90Ra										
<b>Lumen package</b>	<table border="1"> <thead> <tr> <th>Power</th> <th>2700K</th> <th>3000K</th> <th>4000K</th> <th>6500K</th> </tr> </thead> <tbody> <tr> <td>10W/m</td> <td>858 lm/m</td> <td>923 lm/m</td> <td>969 lm/m</td> <td>8960lm/m</td> </tr> </tbody> </table>	Power	2700K	3000K	4000K	6500K	10W/m	858 lm/m	923 lm/m	969 lm/m	8960lm/m
Power	2700K	3000K	4000K	6500K							
10W/m	858 lm/m	923 lm/m	969 lm/m	8960lm/m							
<b>Binning</b>	3 Step										
<b>Lifetime (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data										
<b>Driver requirement</b>	Constant voltage										
<b>Voltage</b>	24VDC										

### ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S1010HOM Neon Flex 10 Multi Bend	1 White	C CRI >90	18 1800K	S10 10W/m	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX
			24 2400K				010 1m	Length in mm
			27 2700K				030 3m	
			30 3000K				050 5m	
			35 3500K				100 10m	
			40 4000K					
			60 6000K					
63S1010HOM	1	C			7			