




FLEX 10X10 MULTI BEND



Horizontal Bending

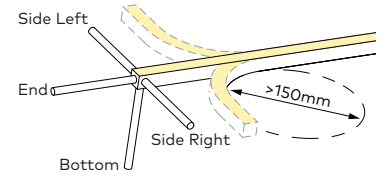

Vertical Bending

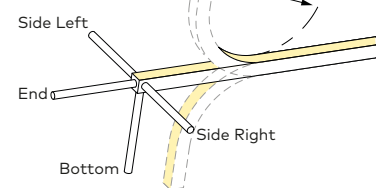

LUMINAIRE SPECIFICATION

Width	10 mm
Height	10 mm
Maximum length	5 W/m : 6 m 10 W/m : 4 m
Cut interval	55.6 mm
Minimum bend diameter	Horizontal : >150 mm Vertical : > 100 mm
Material	White silicone
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	5 W/m and 10 W/m options				
CCT	See options table below				
CRI	>90Ra				
Lumen package	Power	2700K	3000K	4000K	6500K
	5 W/m	375 lm/m	403 lm/m	423 lm/m	419 lm/m
	10W/m	750 lm/m	807 lm/m	847 lm/m	839 lm/m
Binning	3 Step				
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data				
Driver requirement	Constant voltage				
Voltage	24VDC				

ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S1010M Neon Flex 10 Multi Bend	1 White	C CRI >90	18 1800K	S05 5W/m S10 10W/m	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
			24 2400K				010 1m	
			27 2700K				030 3m	
			30 3000K				050 5m	
			35 3500K				100 10m	
			40 4000K					
			60 6000K					
63S1010M	1	C			7			