


FLEX COVE 16 TUNABLE

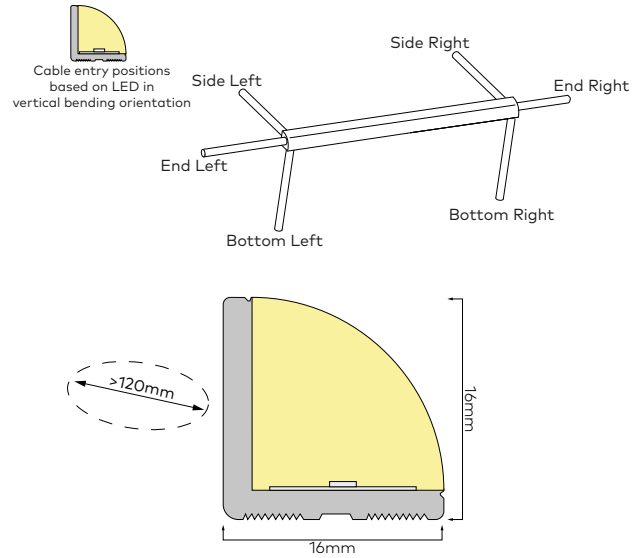

LUMINAIRE SPECIFICATION

Width	16 mm
Height	16 mm
Maximum length	5m
Cut interval	62.5 mm
Minimum bend diameter	>120 mm
Material	White silicone
Mounting	Surface with optional steel clips
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	2x9.6 W/m and 2x13.5 W/m options <u>Total combined power must not exceed single channel power rating</u>		
CCT	See options table below		
Lumen package	Power	2700K	6000K
	2x9.6 W/m	460 lm/m	510 lm/m
	2x13.5 W/m	910 lm/m	960 lm/m
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data		
Driver requirement	2 Channel constant voltage		
Voltage	24VDC		

ORDERING INFORMATION

MODEL	JACKET	CRI	CCT		LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH		
63S16C Neon Flex 16 Cove	1 White	C CRI >90	18	1800K	24	2400K	CT10 2x9.6 W/m CT13 2x13.5 W/m	7 IP67	003	0.3m	.XXXX Length in mm
			24	2400K	27	2700K			010	1m	
			27	2700K	30	3000K			030	3m	
			30	3000K	35	3500K			050	5m	
			35	3500K	40	4000K			100	10m	
			40	4000K	60	6000K					
63S16C	1	C					7				