


FLEX COVE 16 MONO

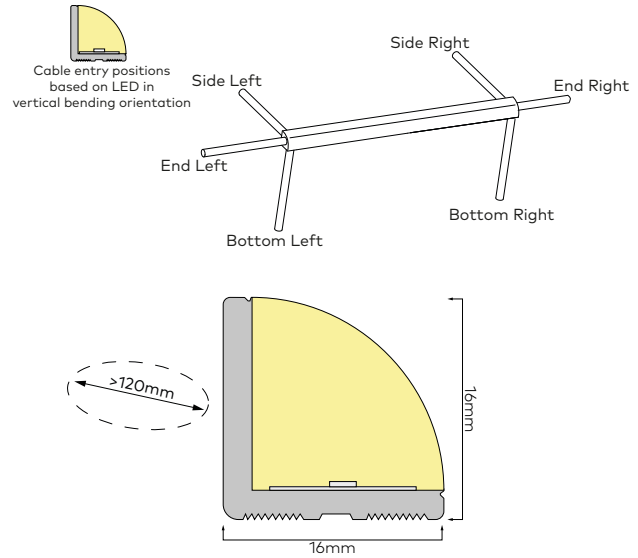

LUMINAIRE SPECIFICATION

Width	16 mm
Height	16 mm
Maximum length	15 m
Cut interval	50 mm
Minimum bend diameter	>120 mm
Material	White silicone
Mounting	Surface with optional steel clips
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	12 W/m										
CCT	See options table below										
Lumen package	<table border="1"> <thead> <tr> <th>Power</th> <th>2700K</th> <th>3000K</th> <th>4000K</th> <th>6000K</th> </tr> </thead> <tbody> <tr> <td>12 W/m</td> <td>580 lm/m</td> <td>600 lm/m</td> <td>650 lm/m</td> <td>640 lm/m</td> </tr> </tbody> </table>	Power	2700K	3000K	4000K	6000K	12 W/m	580 lm/m	600 lm/m	650 lm/m	640 lm/m
Power	2700K	3000K	4000K	6000K							
12 W/m	580 lm/m	600 lm/m	650 lm/m	640 lm/m							
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data										
Driver requirement	Constant voltage										
Voltage	24VDC										

ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S16C Neon Flex 16 Cove	1 White	C CRI >90	18 1800K	S12 12 W/m	BL Bottom Left BR Bottom Right EL End Left ER End Right SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
			24 2400K				010 1m	
			27 2700K				030 3m	
			30 3000K				050 5m	
			35 3500K				100 10m	
			40 4000K					
			60 6000K					
63S16C	1	C		S12		7		