


## FLEX COVE 16 MONO HIGH OUTPUT

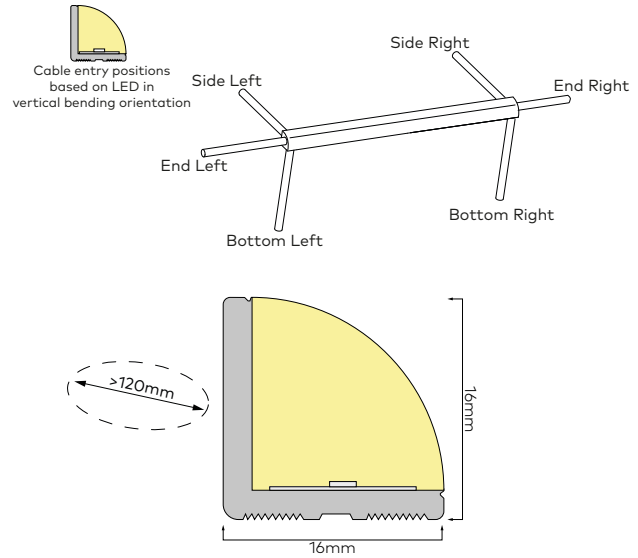

### LUMINAIRE SPECIFICATION

<b>Width</b>	16 mm
<b>Height</b>	16 mm
<b>Maximum length</b>	12 W/m - 17 m 13.5 W/m - 6 m
<b>Cut interval</b>	12 W/m - 50 mm 13.5 W/m - 62.5 mm
<b>Minimum bend diameter</b>	>120 mm
<b>Material</b>	White silicone
<b>Mounting</b>	Surface with optional steel clips
<b>IP Rating</b>	IP67
<b>Protection</b>	UV, flame, salt and chlorine resistant
<b>Standards</b>	EN/AS/NZS 60598-2-1, 62031, 62471
<b>Warranty</b>	5 Years

### LED SPECIFICATION

<b>LED Wattage</b>	12 W/m and 13.5 W/m options				
<b>CCT</b>	See options table below				
<b>Lumen package</b>	<b>Power</b>	<b>2700K</b>	<b>3000K</b>	<b>4000K</b>	<b>6000K</b>
	<b>12 W/m</b>	780 lm/m	800 lm/m	835 lm/m	820 lm/m
	<b>13.5 W/m</b>	1150 lm/m	1180 lm/m	1250 lm/m	1240 lm/m
<b>Lifetime (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data				
<b>Driver requirement</b>	Constant voltage				
<b>Voltage</b>	24VDC				

### ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S16HOC Neon Flex 16 Cove	1 White	C CRI >90	18 1800K	S12 12 W/m S13 13.5 W/m	BL Bottom Left BR Bottom Right EL End Left ER End Right SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
			24 2400K				010 1m	
			27 2700K				030 3m	
			30 3000K				050 5m	
			35 3500K				100 10m	
			40 4000K					
			60 6000K					
			63S16HOC				1	