


## FLEX MINI 8x5 VERTICAL DOMED

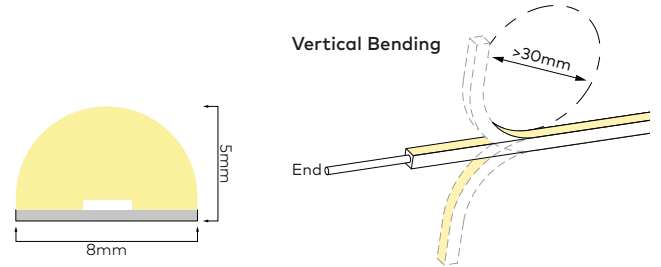

### LUMINAIRE SPECIFICATION

<b>Width</b>	8 mm
<b>Height</b>	5 mm
<b>Maximum length</b>	5 W/m : 7 m 9 W/m : 4 m 14 W/m : 3 m
<b>Cut interval</b>	50 mm
<b>Minimum bend diameter</b>	>30 mm
<b>Material</b>	White silicone
<b>Mounting</b>	Surface
<b>IP Rating</b>	IP65
<b>Protection</b>	UV, flame, salt and chlorine resistant
<b>Standards</b>	EN/AS/NZS 60598-2-1, 62031, 62471
<b>Warranty</b>	5 Years

### LED SPECIFICATION

<b>LED Wattage</b>	5 W/m - 14 W/m			
<b>CCT</b>	See options table below			
<b>CRI</b>	>90Ra			
<b>Lumen package</b> ( 3000K )	2700K	3000K	4000K	
5 W/m	560 lm	595 lm	625 lm	
9 W/m	1050 lm	1110 lm	1170 lm	
14 W/m	1520 lm	1600 lm	1680 lm	
<b>Binning</b>	3 Step			
<b>Lifetime (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data			
<b>Driver requirement</b>	Constant voltage			
<b>Voltage</b>	24 VDC			

### ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S0805VD Neon Flex 8x5 Vertical Domed	1 White	C CRI >90	18 1800K	S05 5 W/m S09 9 W/m S14 14 W/m	E End	5 IP65	003 0.3m	.XXXX Length in mm
			24 2400K				010 1m	
			27 2700K				030 3m	
			30 3000K				050 5m	
			35 3500K				100 10m	
			40 4000K					
			60 6000K					
63S0805VD	1	C			E	5		