




FLEX 10² HORIZONTAL HIGH OUTPUT

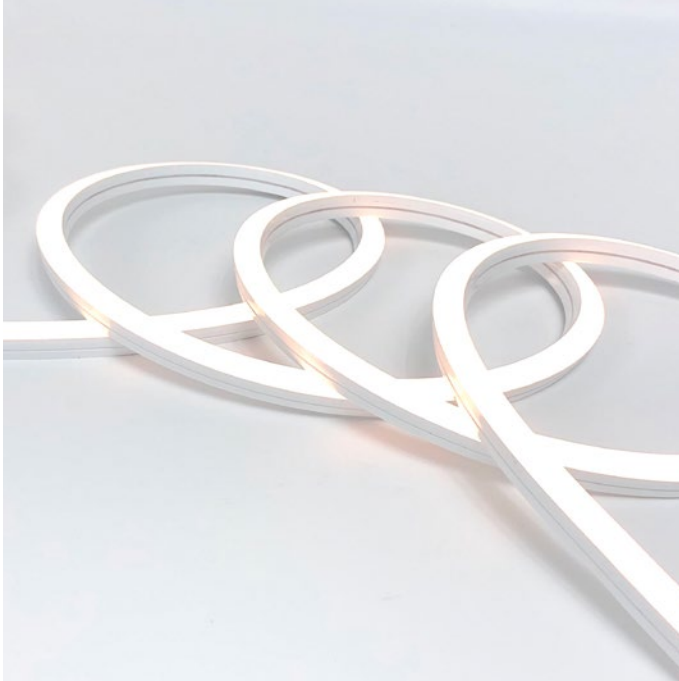

Horizontal Bending

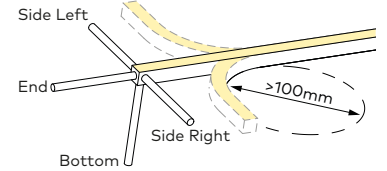

LUMINAIRE SPECIFICATION

Width	10mm
Height	10mm
Maximum length	5m
Cut interval	50mm
Minimum bend diameter	>100mm
Material	White silicone
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	10W/m
CCT	See options table below
CRI	>80Ra and >90Ra options
Lumen package	CRI >80 : 650lm/m CRI >90 : 585lm/m
Binning	3 Step
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
Driver requirement	Constant voltage
Voltage	24VDC

ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S1010HOH Neon Flex 10 Horizontal Flat	1 White	B CRI >80 C CRI >90	18 1800K	S10 10W/m	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
			24 2400K				010 1m	
		27 2700K	030 3m					
		30 3000K	050 5m					
		35 3500K	100 10m					
		40 4000K						
		60 6000K						
63S1010HOH	1			S10		7		