



FLEX 10 HORIZONTAL DMX PIXEL



Horizontal Bending

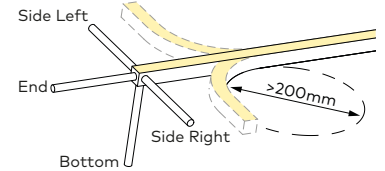

LUMINAIRE SPECIFICATION

Width	10mm
Height	20mm
Maximum length	5m with 10m input cable 8m with 0.5m input cable
Cut interval	100mm
Minimum bend diameter	>200mm
Material	White silicone
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	12W/m
LED Type	DMX Pixel
LED Qty	60 LEDs/m
Pixel Qty	30 Pixels/m
CCT	See options table below
CRI	>90
Binning	3 Step
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
Driver requirement	Constant voltage
Voltage	24VDC

ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S10H Neon Flex 10 Horizontal	1 White	C CRI >90	18 1800K	DMX30P12 12W/m 30P/m	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
			24 2400K				010 1m	
			27 2700K				030 3m	
			30 3000K				050 5m	
			35 3500K				100 10m	
			40 4000K					
			60 6000K					
63S10H	1	C		DMX30P12		7		