



FLEX 10 HORIZONTAL DMX PIXEL TUNABLE



Horizontal Bending

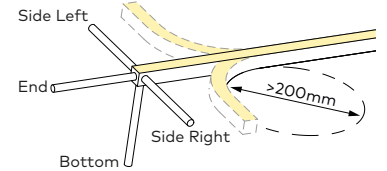

LUMINAIRE SPECIFICATION

Width	10mm
Height	20mm
Maximum length	5m with 10m input cable 8m with 0.5m input cable
Cut interval	125mm
Minimum bend diameter	>200mm
Material	White silicone
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	13W/m
LED Type	DMX Pixel
LED Qty	64 LEDs/m
Pixel Qty	16 Pixels/m
CCT	See options table below
Binning	3 Step
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
Driver requirement	Constant voltage
Voltage	24VDC

ORDERING INFORMATION

MODEL	JACKET	CCT	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH	
63S10H Neon Flex 10 Horizontal	1 White	C18	1800K	24 2400K	CTDMX16P13 13W/m 16P/m	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
		C24	2400K	27 2700K				010 1m	
		C27	2700K	30 3000K				030 3m	
		C30	3000K	35 3500K				050 5m	
		C35	3500K	40 4000K				100 10m	
		C40	4000K	60 6000K					
63S10H	1			CTDMX16P13		7			