



FLEX 10 HORIZONTAL



Horizontal Bending

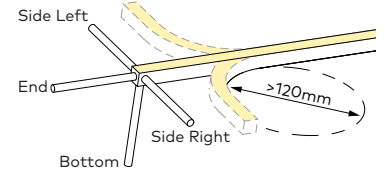

LUMINAIRE SPECIFICATION

| | |
|-----------------------|--|
| Width | 10mm |
| Height | 20mm |
| Maximum length | 5W/m : 20m 10W/m and 12W/m : 15m |
| Cut interval | 50mm |
| Minimum bend diameter | >120mm |
| Material | White silicone |
| Mounting | Surface |
| IP Rating | IP67 |
| Protection | UV, flame, salt and chlorine resistant |
| Standards | EN/AS/NZS 60598-2-1, 62031, 62471 |
| Warranty | 5 Years |

LED SPECIFICATION

| | |
|--------------------|---|
| LED Wattage | 5W/m, 10W/m and 12W/m options |
| CCT | See options table below |
| CRI | >90Ra |
| Lumen package | 5W/m : 140lm/m 10W/m : 260lm/m 12W/m : 300lm/m |
| Binning | 3 Step |
| Lifetime (L70) | 50,000hrs based on LM-80 & TM-21 applicable test data |
| Driver requirement | Constant voltage |
| Voltage | 24VDC |

ORDERING INFORMATION

| MODEL | JACKET | CRI | CCT | LED TYPE | CABLE ENTRY | CONNECTOR IP | CABLE LENGTH | LENGTH |
|-----------------------------------|---------|-----------|--|------------------------------------|--|--------------|---|-----------------------|
| 63S10H Neon Flex 10 Horizontal | 1 White | C CRI >90 | 18 1800K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 60 6000K | S05 5W/m S10 10W/m S12 12W/m | E End B Bottom SL Side Left SR Side Right | 7 IP67 | 003 0.3m 010 1m 030 3m 050 5m 100 10m | .XXXX Length in mm |
| 63S10H | 1 | C | | | | 7 | | |