
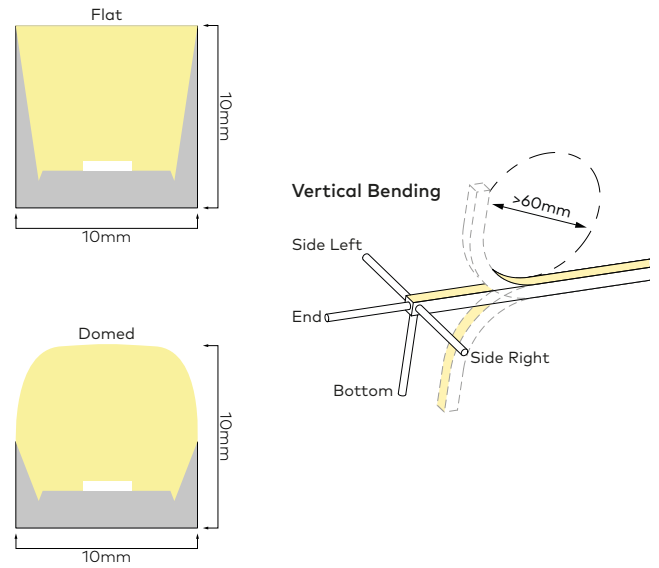


FLEX 10 VERTICAL HIGH OUTPUT

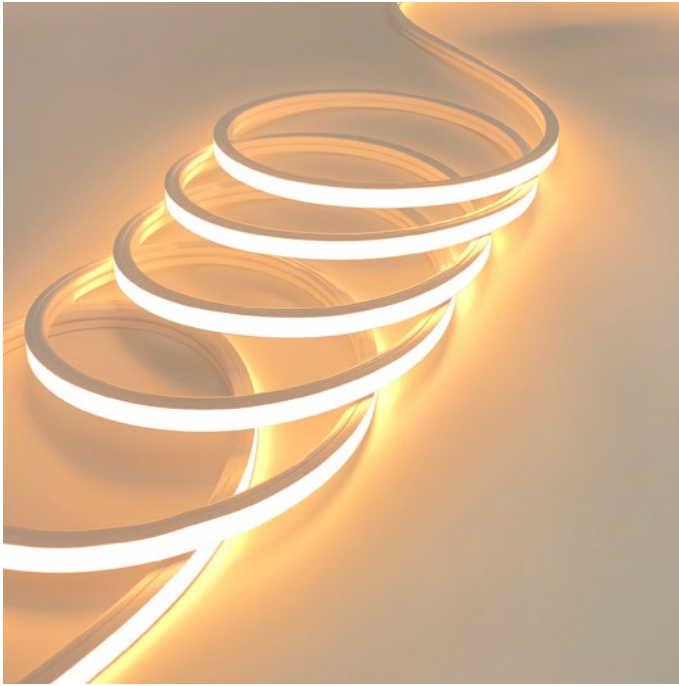

LUMINAIRE SPECIFICATION

Width	10mm
Height	10mm
Maximum length	10m
Cut interval	50mm
Minimum bend diameter	>60mm
Material	White silicone
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	10W/m
CCT	See options table below
CRI	>80R and >90Ra options
Lumen package	CRI >80 : 760lm/m CRI >90 : 690lm/m
Binning	3 Step
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
Driver requirement	Constant voltage
Voltage	24VDC

ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S10HOV Neon Flex 10 Vertical Flat	1 White	B CRI >80 C CRI >90	18 1800K	S10 10W/m	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
			24 2400K				010 1m	
			27 2700K				030 3m	
			30 3000K				050 5m	
63S10HOVD Neon Flex 10 Vertical Domed	1 White	B CRI >80 C CRI >90	35 3500K	S10 10W/m	E End B Bottom SL Side Left SR Side Right	7 IP67	100 10m	.XXXX Length in mm
			40 4000K					
			40 4000K					
			60 6000K					
	1			S10		7		