
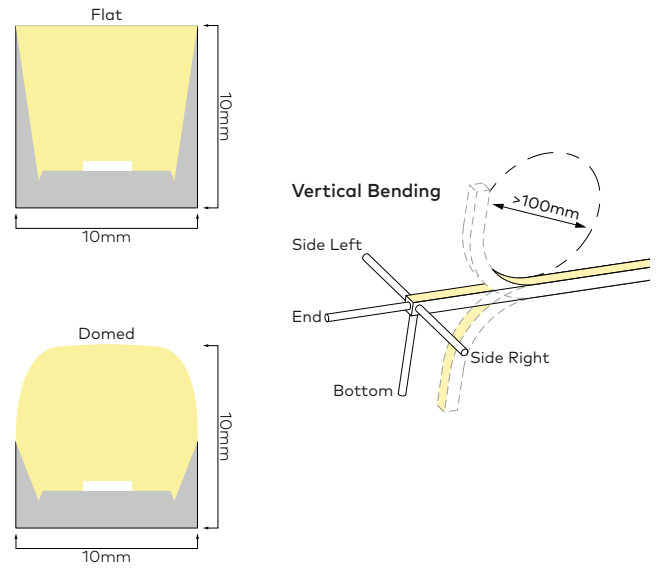


FLEX 10 VERTICAL

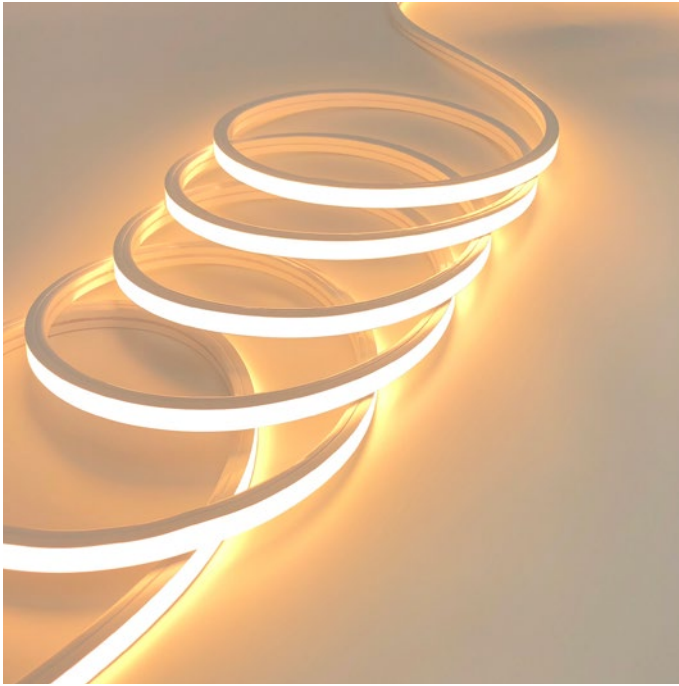

LUMINAIRE SPECIFICATION

Width	10mm
Height	10mm
Maximum length	5W/m : 10m 10W/m : 5m and 10m options
Cut interval	50mm
Minimum bend diameter	>100mm
Material	White silicone
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	5W/m and 10W/m options
CCT	See options table below
CRI	>90Ra
Lumen package	5W/m : 310lm/m 10W/m : 570lm/m
Binning	3 Step
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
Driver requirement	Constant voltage
Voltage	24VDC

ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S10V Neon Flex 10 Vertical Flat	1 White	C CRI >90	18 1800K	S05 5W/m S10 10W/m (5m max.) L10 10W/m (10m max.)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
			24 2400K				010 1m	
			27 2700K				030 3m	
			30 3000K				050 5m	
			35 3500K				100 10m	
			40 4000K					
	60 6000K							
63S10VD Neon Flex 10 Vertical Domed	1					7		