



FLEX 12 HORIZONTAL DMX PIXEL



Horizontal Bending

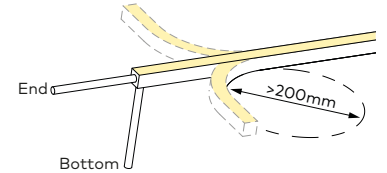

LUMINAIRE SPECIFICATION

Width	12mm / 15mm
Height	25mm
Maximum length	5m with 10m input cable 8m with 0.5m input cable
Cut interval	100mm
Minimum bend diameter	>200mm
Material	White silicone
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	12W/m
LED Type	DMX Pixel
LED Qty	60 LEDs/m
Pixel Qty	30 Pixels/m
CCT	See options table below
CRI	>90
Binning	3 Step
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
Driver requirement	Constant voltage
Voltage	24VDC

ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S12H Neon Flex 12 Horizontal	1 White	C CRI >90	18 1800K	DMX30P12 12W/m 30P/m	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
			24 2400K				010 1m	
			27 2700K				030 3m	
			30 3000K				050 5m	
			35 3500K				100 10m	
			40 4000K					
			60 6000K					
63S12H	1	C		DMX30P12		7		