



## FLEX 12 HORIZONTAL DMX PIXEL TUNABLE



Horizontal Bending

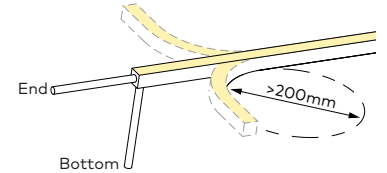

### LUMINAIRE SPECIFICATION

<b>Width</b>	12mm / 15mm
<b>Height</b>	25mm
<b>Maximum length</b>	5m with 10m input cable 8m with 0.5m input cable
<b>Cut interval</b>	125mm
<b>Minimum bend diameter</b>	>200mm
<b>Material</b>	White silicone
<b>Mounting</b>	Surface
<b>IP Rating</b>	IP67
<b>Protection</b>	UV, flame, salt and chlorine resistant
<b>Standards</b>	EN/AS/NZS 60598-2-1, 62031, 62471
<b>Warranty</b>	5 Years

### LED SPECIFICATION

<b>LED Wattage</b>	13W/m
<b>LED Type</b>	DMX Pixel
<b>LED Qty</b>	64 LEDs/m
<b>Pixel Qty</b>	16 Pixels/m
<b>CCT</b>	See options table below
<b>Binning</b>	3 Step
<b>Lifetime (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>Driver requirement</b>	Constant voltage
<b>Voltage</b>	24VDC

### ORDERING INFORMATION

MODEL	JACKET	CCT	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH		
63S12H Neon Flex 12 Horizontal	1	White	C18 1800K	24 2400K	CTDMX16P13	13W/m 16P/m	E End	7 IP67	003 0.3m	.XXXX Length in mm
			C24 2400K	27 2700K					010 1m	
			C27 2700K	30 3000K					030 3m	
			C30 3000K	35 3500K					050 5m	
			C35 3500K	40 4000K					100 10m	
			C40 4000K	60 6000K						
63S12H	1			CTDMX16P13		7				