



## FLEX 12 HORIZONTAL HIGH OUTPUT



Horizontal Bending

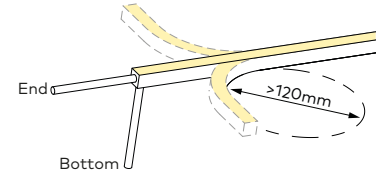

### LUMINAIRE SPECIFICATION

<b>Width</b>	12mm / 15mm
<b>Height</b>	25mm
<b>Maximum length</b>	10W/m and 13.5W/m : 5m 12W/m : 15m
<b>Cut interval</b>	10W/m and 13.5W/m : 62.5mm 12W/m : 50mm
<b>Minimum bend diameter</b>	>120mm
<b>Material</b>	White silicone
<b>Mounting</b>	Surface
<b>IP Rating</b>	IP67
<b>Protection</b>	UV, flame, salt and chlorine resistant
<b>Standards</b>	EN/AS/NZS 60598-2-1, 62031, 62471
<b>Warranty</b>	5 Years

### LED SPECIFICATION

<b>LED Wattage</b>	10W/m, 12W/m and 13.5W/m options		
<b>CCT</b>	See options table below		
<b>CRI</b>	>80R and >90Ra options		
<b>Lumen package</b>		CRI >80	CRI >90
	10W/m	550lm/m	500lm/m
	12W/m	520lm/m	475lm/m
	13.5W/m	770lm/m	700lm/m
<b>Binning</b>	3 Step		
<b>Lifetime (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data		
<b>Driver requirement</b>	Constant voltage		
<b>Voltage</b>	24VDC		

### ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S12HOH Neon Flex 12 Horizontal	1 White	B CRI >80	18 1800K	S10 10W/m	E End B Bottom	7 IP67	003 0.3m	.XXXX
			24 2400K	S12 12W/m			010 1m	Length in mm
		C CRI >90	27 2700K	S13 13.5W/m	030 3m			
			30 3000K		050 5m			
			35 3500K		100 10m			
			40 4000K					
			60 6000K					
63S12HOH	1				7			