


FLEX 15 HORIZONTAL HIGH OUTPUT

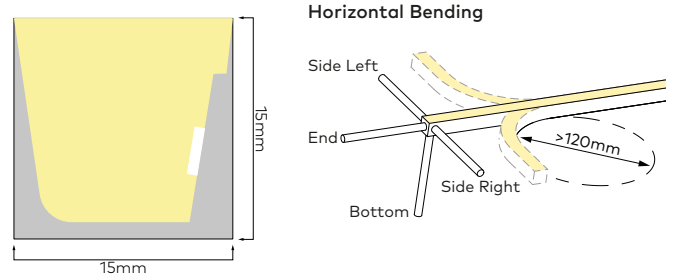

LUMINAIRE SPECIFICATION

Width	15mm
Height	15mm
Maximum length	10W/m and 13.5W/m : 5m 12W/m : 15m
Cut interval	10W/m and 13.5W/m : 62.5mm 12W/m : 50mm
Minimum bend diameter	>120mm
Material	White silicone
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	10W/m , 12W/m and 13.5W/m options		
CCT	See options table below		
CRI	>80R and >90Ra options		
Lumen package		CRI >80	CRI >90
10W/m	920lm/m	835lm/m	835lm/m
12W/m	860lm/m	785lm/m	785lm/m
13.5W/m	1290lm/m	1175lm/m	1175lm/m
Binning	3 Step		
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data		
Driver requirement	Constant voltage		
Voltage	24VDC		

ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S15HOH Neon Flex 15 Horizontal	1 White	B CRI >80	18 1800K	S10 10W/m	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
			24 2400K				010 1m	
		C CRI >90	27 2700K	S12 12W/m			030 3m	
			30 3000K				050 5m	
		35 3500K	S13 13.5W/m	100 10m				
		40 4000K						
		60 6000K						
63S15HOH	1				7			