


## FLEX 15 MULTI BEND HIGH OUTPUT

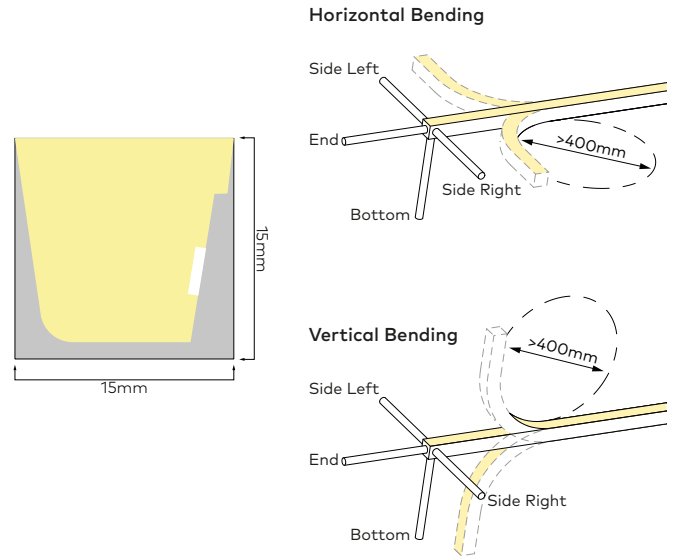

### LUMINAIRE SPECIFICATION

Width	15mm
Height	15mm
Maximum length	5m
Cut interval	50mm
Minimum bend diameter	>400mm
Material	White silicone
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

### LED SPECIFICATION

LED Wattage	12W/m	
CCT	See options table below	
CRI	>80Ra and >90Ra options	
Lumen package	CRI >80 12W/m 860lm/m	CRI >90 775lm/m
Binning	3 Step	
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data	
Driver requirement	Constant voltage	
Voltage	24VDC	

### ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S15HOM Neon Flex 15 Multi Bend	1 White	B CRI >80	18 1800K	S12 12W/m	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX
			24 2400K				010 1m	Length in mm
		27 2700K	030 3m					
		30 3000K	050 5m					
		35 3500K	100 10m					
		40 4000K						
		60 6000K						
63S15HOM	1					7		