
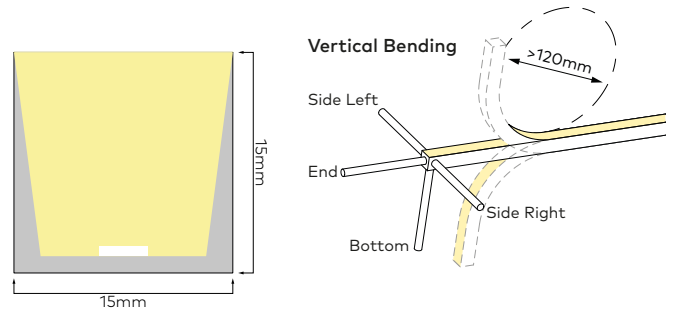


FLEX 15 VERTICAL RGBW

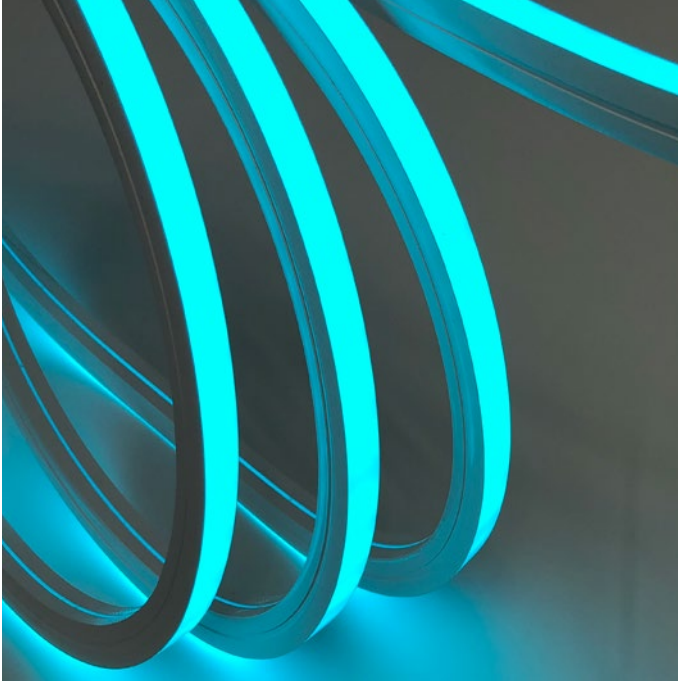

LUMINAIRE SPECIFICATION

Width	15mm
Height	15mm
Maximum length	5m and 10m options
Cut interval	100mm
Minimum bend diameter	>120mm
Material	White silicone
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	16W/m
CCT	See options table below
Lumen package RGBW	R : 70lm/m, G : 150lm/m, B : 30lm/m W : 200m/m
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
Driver requirement	Constant voltage
Voltage	24VDC

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH	
63S15V Neon Flex 15 Vertical	1 White	RGBW27	RGBW-2700K	S16 16W/m (5m max.)	E End	7 IP67	003 0.3m	.XXXX Length in mm
		RGBW30	RGBW-3000K	L16 16W/m (10m max.)	B Bottom		010 1m	
		RGBW40	RGBW-4000K		SL Side Left		030 3m	
		RGBW60	RGBW-6000K		SR Side Right		050 5m	
							100 10m	
63S15V	1				7			