


## FLEX 20 VERTICAL DOMED DMX PIXEL

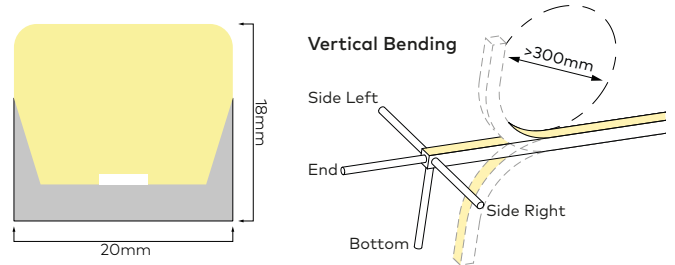

### LUMINAIRE SPECIFICATION

<b>Width</b>	20mm
<b>Height</b>	18mm
<b>Maximum length</b>	5m with 10m input cable 8m with 0.5m input cable
<b>Cut interval</b>	100mm
<b>Minimum bend diameter</b>	>300mm
<b>Material</b>	White silicone
<b>Mounting</b>	Surface
<b>IP Rating</b>	IP67
<b>Protection</b>	UV, flame, salt and chlorine resistant
<b>Standards</b>	EN/AS/NZS 60598-2-1, 62031, 62471
<b>Warranty</b>	5 Years

### LED SPECIFICATION

<b>LED Wattage</b>	12W/m
<b>LED Type</b>	DMX Pixel
<b>LED Qty</b>	60 LEDs/m
<b>Pixel Qty</b>	30 Pixels/m
<b>CCT</b>	See options table below
<b>CRI</b>	>90
<b>Binning</b>	3 Step
<b>Lifetime (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>Driver requirement</b>	Constant voltage
<b>Voltage</b>	24VDC

### ORDERING INFORMATION

MODEL	JACKET	CRI	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S20VD Neon Flex 20 Vertical Domed	1 White	C CRI >90	18 1800K	DMX30P12 12W/m 30P/m	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m	.XXXX Length in mm
			24 2400K				010 1m	
			27 2700K				030 3m	
			30 3000K				050 5m	
			35 3500K				100 10m	
			40 4000K					
			60 6000K					
63S20VD	1	C		DMX30P12		7		